

VICINITY MAP
N.T.S.

Know what's **below.**
Call before you dig.

6.COLOR KEY:
·WHITE - PROPOSED EXCAVATION
·PINK - TEMP. SURVEY MARKINGS
·RED - ELECTRIC
·YELLOW - GAS/OIL/STEAM
·ORANGE - COMMUNICATIONS/CATV
·BLUE - WATER
·PURPLE - RECLAIMED WATER
·GREEN - SEWER

1.CALL 811 FROM ANYWHERE IN THE USA AND YOUR CALL WILL BE ROUTED TO YOUR LOCAL ONE-CALL CENTER WHERE OPERATORS WILL ASK YOU FOR THE LOCATION OF YOUR DIGGING/DRILLING JOB AND ROUTE YOUR CALLTO THE AFFECTED UTILITY COMPANIES. YOUR LOCAL UTILITY COMPANIES WILL THEN SEND A PROFESSIONAL LOCATOR TO YOUR JOB TO MARK CONFLICTS WITHIN A FEW DAYS.
2.CALL AT LEAST 3 DAYS BEFORE EXCAVATING TO AVOID SERIOUS FINES AND REPAIR EXPENSES. MARK THE PLANNED EXCAVATION AREAS WITH WHITE PAINT. PAINT SHALL BE WATER-BASED QUIK-MARK BY KRYLON OR EQUAL.
3.PROVIDE: ADDRESS, CITY, COUNTY, FOREMAN'S NAME, PHONE NUMBER, COMPANY, NATURE OF WORK, DATE WORK WILL BEGIN, PERMIT NUMBER, THOMAS GUIDE PAGE AND GRIDS.
4.UTILITY MARKINGS GENERALLY EXPIRE AFTER 14 DAYS AFTER WHICH THE PROCESS MUST BE REPEATED. NO EXCAVATION PERMIT IS VALID WITHOUT FIRST CALLING 811. HAND-DIG TO 24" ON EITHER SIDE OF ALL UTILITIES. IT IS THE CONTRACTOR'S AND SUBCONTRACTOR'S RESPONSIBILITY TO EACH CALL 811.
5.EXCAVATING REQUIREMENTS VARY DEPENDING ON LOCAL LAWS. COLOR CODES MAY VARY AND LOCAL REQUIREMENTS SHALL SUPERSEDE THIS GENERAL WARNING. FOR MORE INFORMATION, CHECK OUT THE COMMON GROUND AULIANCE AT WWW.CALL811.COM.

APPLICABLE CODES

2021 SOUTH CAROLINA BUILDING CODE OF THE 2021 INTERNATIONAL BUILDING CODE WITH SC MODIFICATIONS
2021 SOUTH CAROLINA RESIDENTIAL CODE OR THE 2021 INTERNATIONAL RESIDENTIAL CODE WITH SC MODIFICATIONS
2021 SOUTH CAROLINA FIRE CODE OR THE 2021 INTERNATIONAL FIRE CODE WITH SC MODIFCATIONS
2021 SOUTH CAROLINA PLUMBING CODE OR THE 2021 INTERNATIONAL PLUMBING CODE WITH SC MODIFCATIONS
2021 SOUTH CAROLINA MECHANICAL CODE OR THE 2021 INTERNATIONAL MECHANICAL CODE WITH SC MODIFCATIONS
2021 SOUTH CAROLINA FUEL GAS CODE OR THE 2021 INTERNATIONAL FUEL GAS CODE WITH SC MODIFCATIONS
2020 NATIONAL ELECTRICAL CODE WITH SC MODIFICATIONS
2009 INTERNATIONAL ENERGY CODE
SCDHEC REGULATION 61-51 PUBLIC SWIMMING POOL


SP-1	TABLE OF CONTENTS
SP-2	SITE PLAN
SP-3	POOL SHELL DIMENSIONS
SP-4	POOL SHELL LAYOUT
SP-5	POOL EQUIPMENT ROOM
SP-6	SPECS NOTES AND DETAILS
SP-7	POOL PLUMBING PLAN
SP-8	POOL SECTIONS AND DETAILS
SP-9	POOL SECTIONS AND DETAILS
SP-10	DECK & DRAINAGE LAYOUT

THIS NOTE APPLIES TO ALL SHEETS

THE PROFESSIONAL ENGINEER WAIVES ANY AND ALL RESPONSIBILITY AND LIABILITY FOR PROBLEMS WHICH ARISE FROM FAILURE TO FOLLOW THESE PLANS, SPECIFICATIONS AND DESIGN INTENT THEY CONVEY, OR FOR PROBLEMS WHICH ARISE FROM OTHER'S FAILURE TO OBTAIN AND/OR FOLLOW THE PROFESSIONAL ENGINEER GUIDANCE WITH ARE ALLEGED.

BUILDINGS SHALL BE CONSTRUCTED IN FULL CONFORMANCE WITH ALL APPLICABLE CODES AND RESTRICTIONS.

PROFESSIONAL ENGINEER SHALL BE NOTIFIED PRIOR TO CONSTRUCTION IN THE EVENT OF CODE REVISION AND/OR CHANGES.

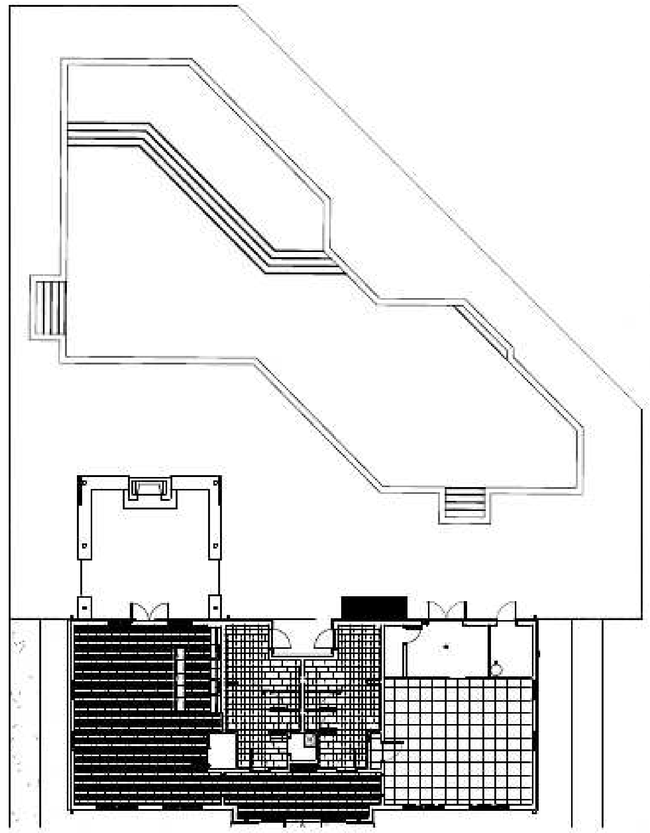

GENERAL NOTES:

1. ALL CONTRACTORS SHALL OBSERVE ALL REGULATIONS IMPOSED BY THE APPROPRIATE GOVERNING BODIES, AND ALL WORK SHALL COMPLY WITH THE REQUIREMENTS OF THE BUILDING CODES, ACCIDENT AND FIRE PREVENTION REGULATIONS. ALL MATERIALS, EQUIPMENT, WORKMANSHIP, WORKING CONDITIONS, AND CONSTRUCTION METHODS SHALL COMPLY WITH THE LATEST APPLICABLE SECTIONS OF LOCAL MUNICIPAL, CITY, STATE, & FEDERAL CODES, ORDINANCES, & STANDARDS
2. THE CONTRACTOR SHALL VERIFY ALL DIMENSIONS & CONDITIONS PRIOR TO STARTING ANY CONSTRUCTION AND SHALL NOTIFY THE ENGINEER OF ANY DISCREPANCIES AT THE BUILDING SITE.
3. THE CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS SHOWN ON THE DRAWINGS & CONSTRUCT ALL NEW WORK IN A NEAT & APPROVED MANNER
4. THE CONTRACTOR SHALL ESTABLISH AND VERIFY ALL OPENINGS & INSERTS FOR MECHANICAL AND ELECTRICAL WORK AS REQUIRED FOR THEIR INSTALLATION AND PER DRAWINGS (IF APPLICABLE)
5. THE CONTRACTOR SHALL PROVIDE ALL NECESSARY TEMPORARY BRACING, SHORING, GUYING, OR OTHER MEANS TO AVOID EXCESSIVE STRESSES AND TO HOLD STRUCTURAL ELEMENTS IN PLACE.
6. THE CONTRACTOR SHALL BE RESPONSIBLE FOR SAFETY AND SECURITY IN & AROUND THE JOB SITE DURING CONSTRUCTION.
7. THE CONTRACTOR SHALL SUBMIT/FILE FOR PAY & SECURE ALL APPROVALS. BUILDING PERMITS, FIRE PERMITS, TEST, AND CERTIFICATES OF COMPLIANCE & OCCUPANCY.
8. THE DIMENSIONS ON THESE DRAWINGS IN ALL CASES SUPERSEDE SCALE CONTRACTOR IS NOT TO SCALE DRAWINGS. ALL DIMENSIONING IS TO FINISH FACE OF CONSTRUCTION.
9. THE CONTRACTOR SHALL BE RESPONSIBLE FOR RUBBISH SWEPT UP & REMOVED, UPON COMPLETION OF WORK, THE CONTRACTOR SHALL LEAVE WORK IN A FINISHED CONDITION.
10. IT WILL BE THE DUTY OF THE CONTRACTORS TO COMMUNICATE IMMEDIATELY WITH EACH OTHER IN ORDER TO SCHEDULE WORK IN ORDER TO SCHEDULE WORK STORAGE AREAS, ETC. IN AN APPROVED MANNER AND WITHIN THE TIME SPECIFIED.

Carolina Pools LLC
1062 S. Batesville Rd.
Greer, SC 29650
TEL: (864) 655 7016
CAROLINAPOOLSLLC.COM

CLIENT
DR.HORTON

ADAMS GLEM - SWIMMING POOL
ASHMORE BRIDGE ROAD MAULDIN SC


NO.	EMISSIONS & REVISIONS	DATES

SEAL:

Drawing Name:
TABLE OF CONTENTS

PROJECT NO: 019

DESIGN BY:	PAUL	DRAWING NO.	
SCALE:	NA		SP-1
DRAWN BY:	IVAN		
VERIFY BY:	PAUL		
START DATE:	20 JAN 2024	REVISION #	00

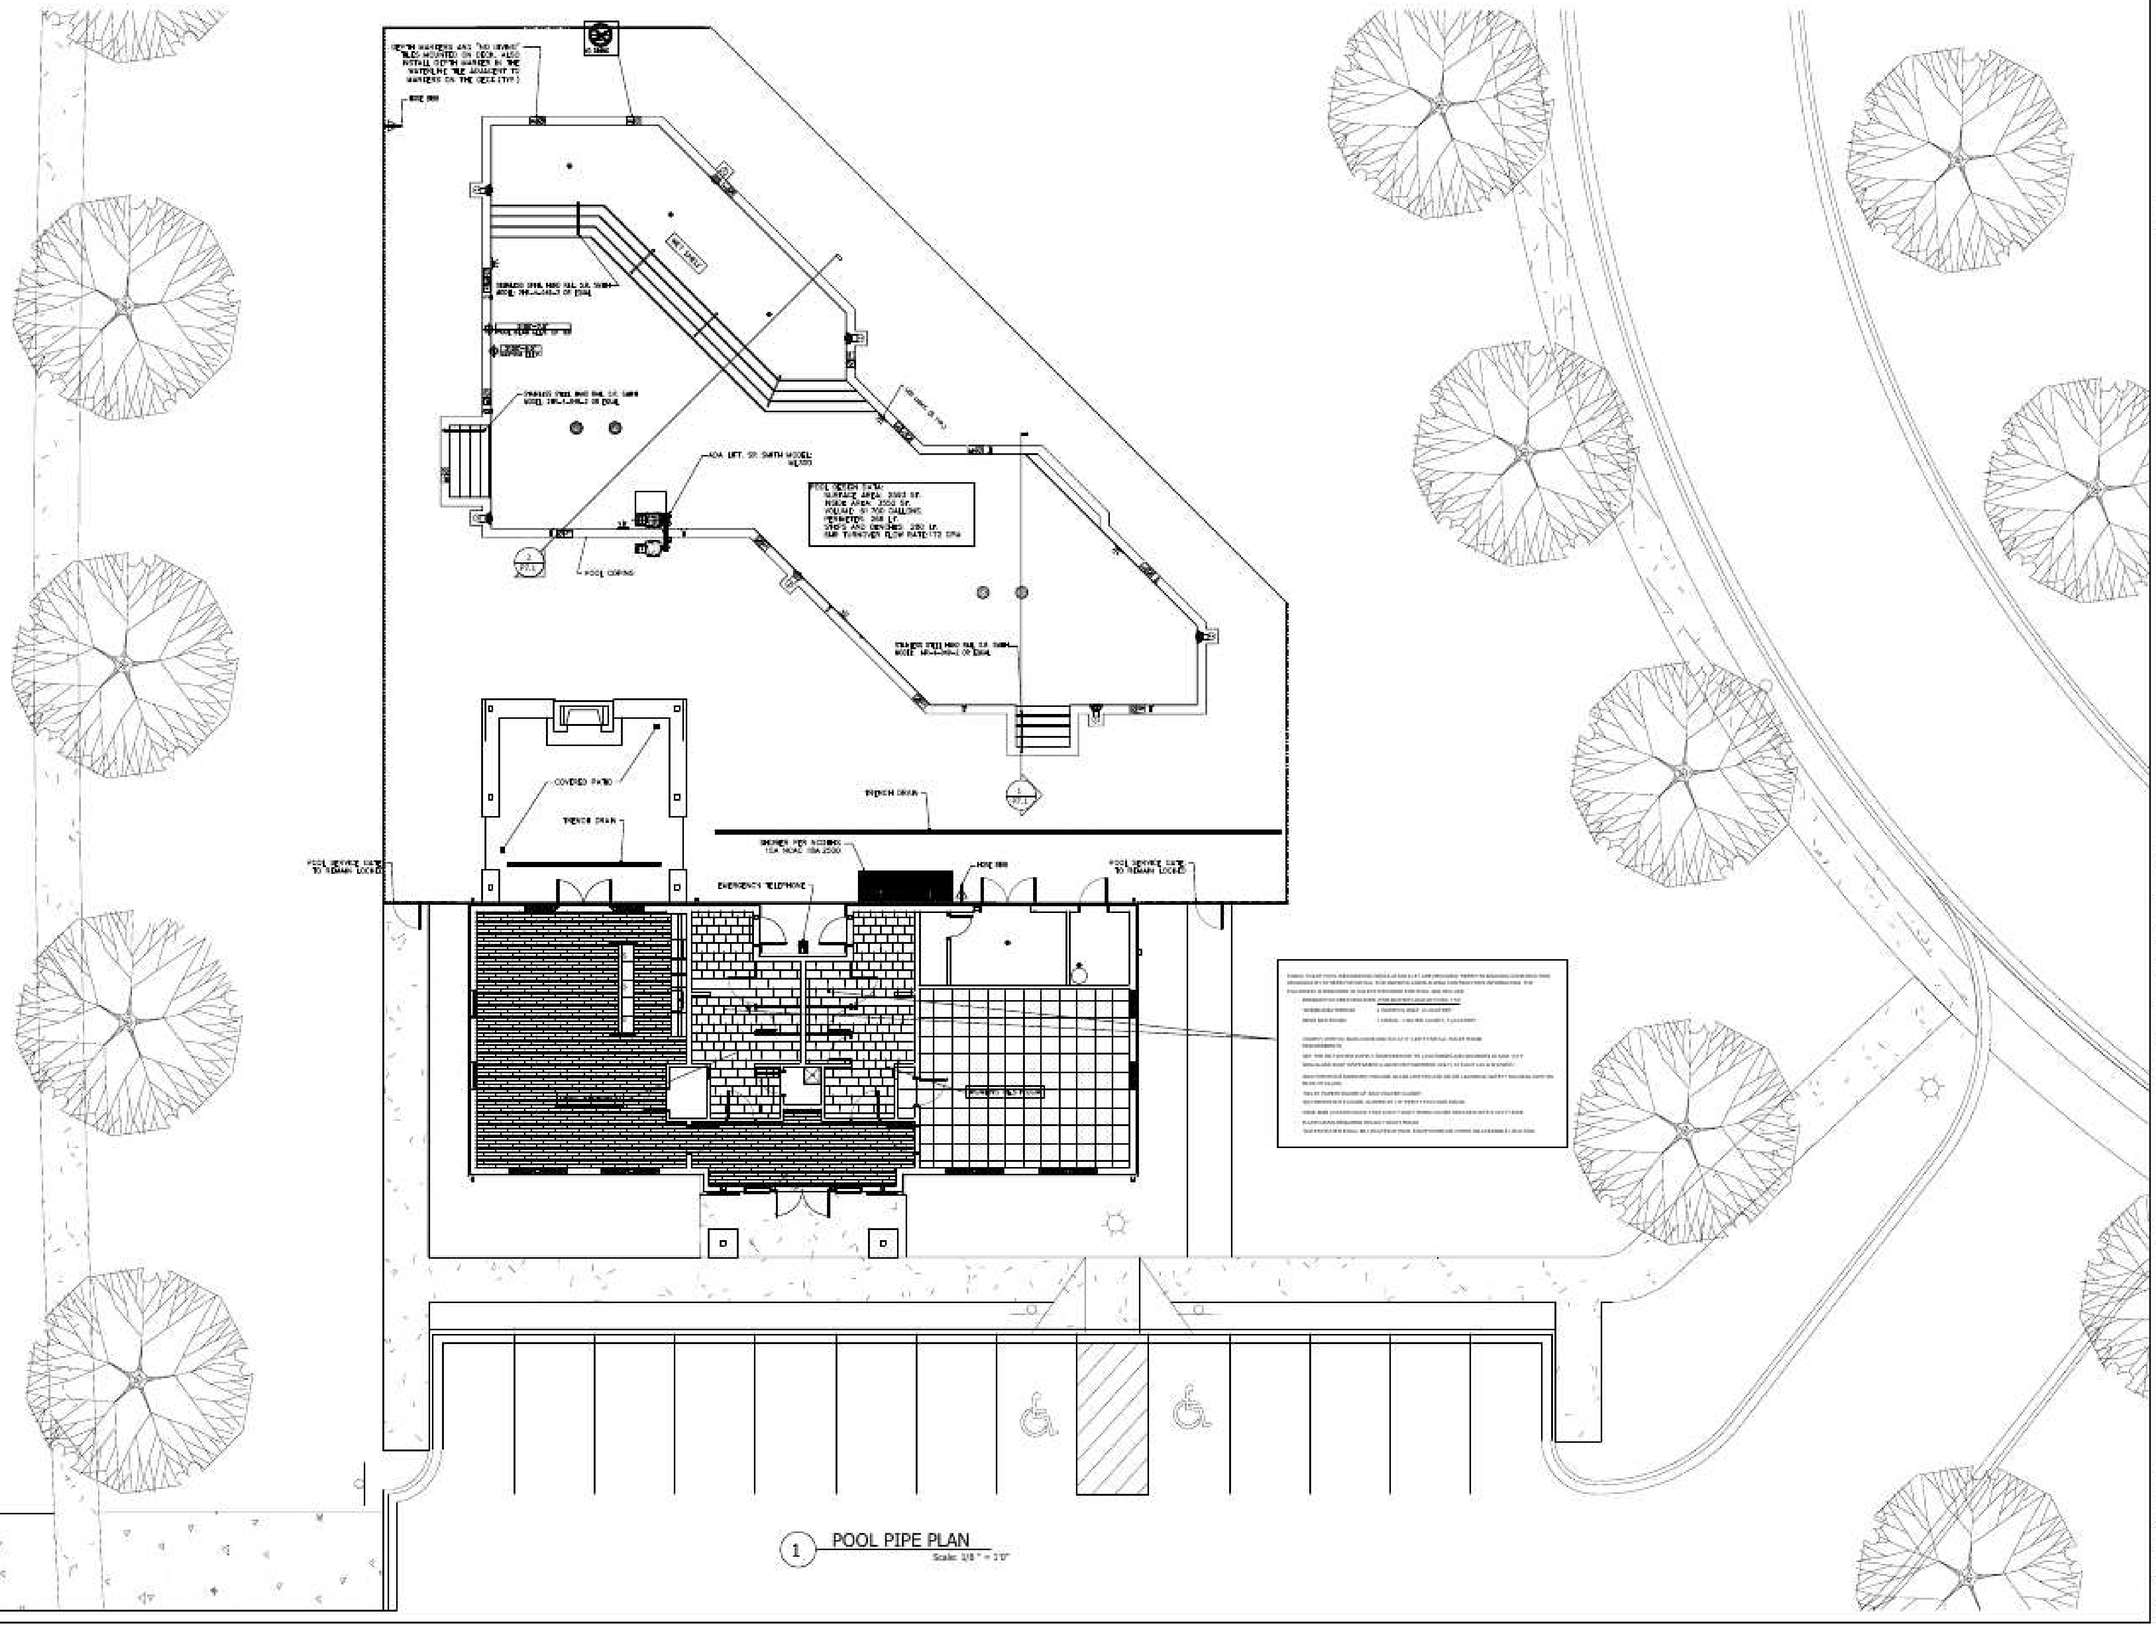

1 POOL PIPE PLAN
Scale: 1/8 " = 1'0"

Carolina Pools LLC
1062 S. Batesville Rd.
Greer, SC 29650
TEL: (864) 655 7016
CAROLINAPOOLSLLC.COM

CLIENT
DR.HORTON


ADAMS GLEM - SWIMMING POOL
ASHMORE BRIDGE ROAD MAULDIN SC

NO.	EMISSIONS & REVISIONS	DATES

SEAL:

Drawing Name:
SITE PLAN

PROJECT NO:	019		
DESIGN BY:	PAUL	DRAWING NO.	SP-2
SCALE:	1/8" = 1'0"		
DRAWN BY:	IVAN		
VERIFY BY:	PAUL		
START DATE:	20 JAN 2024	REVISION #	00

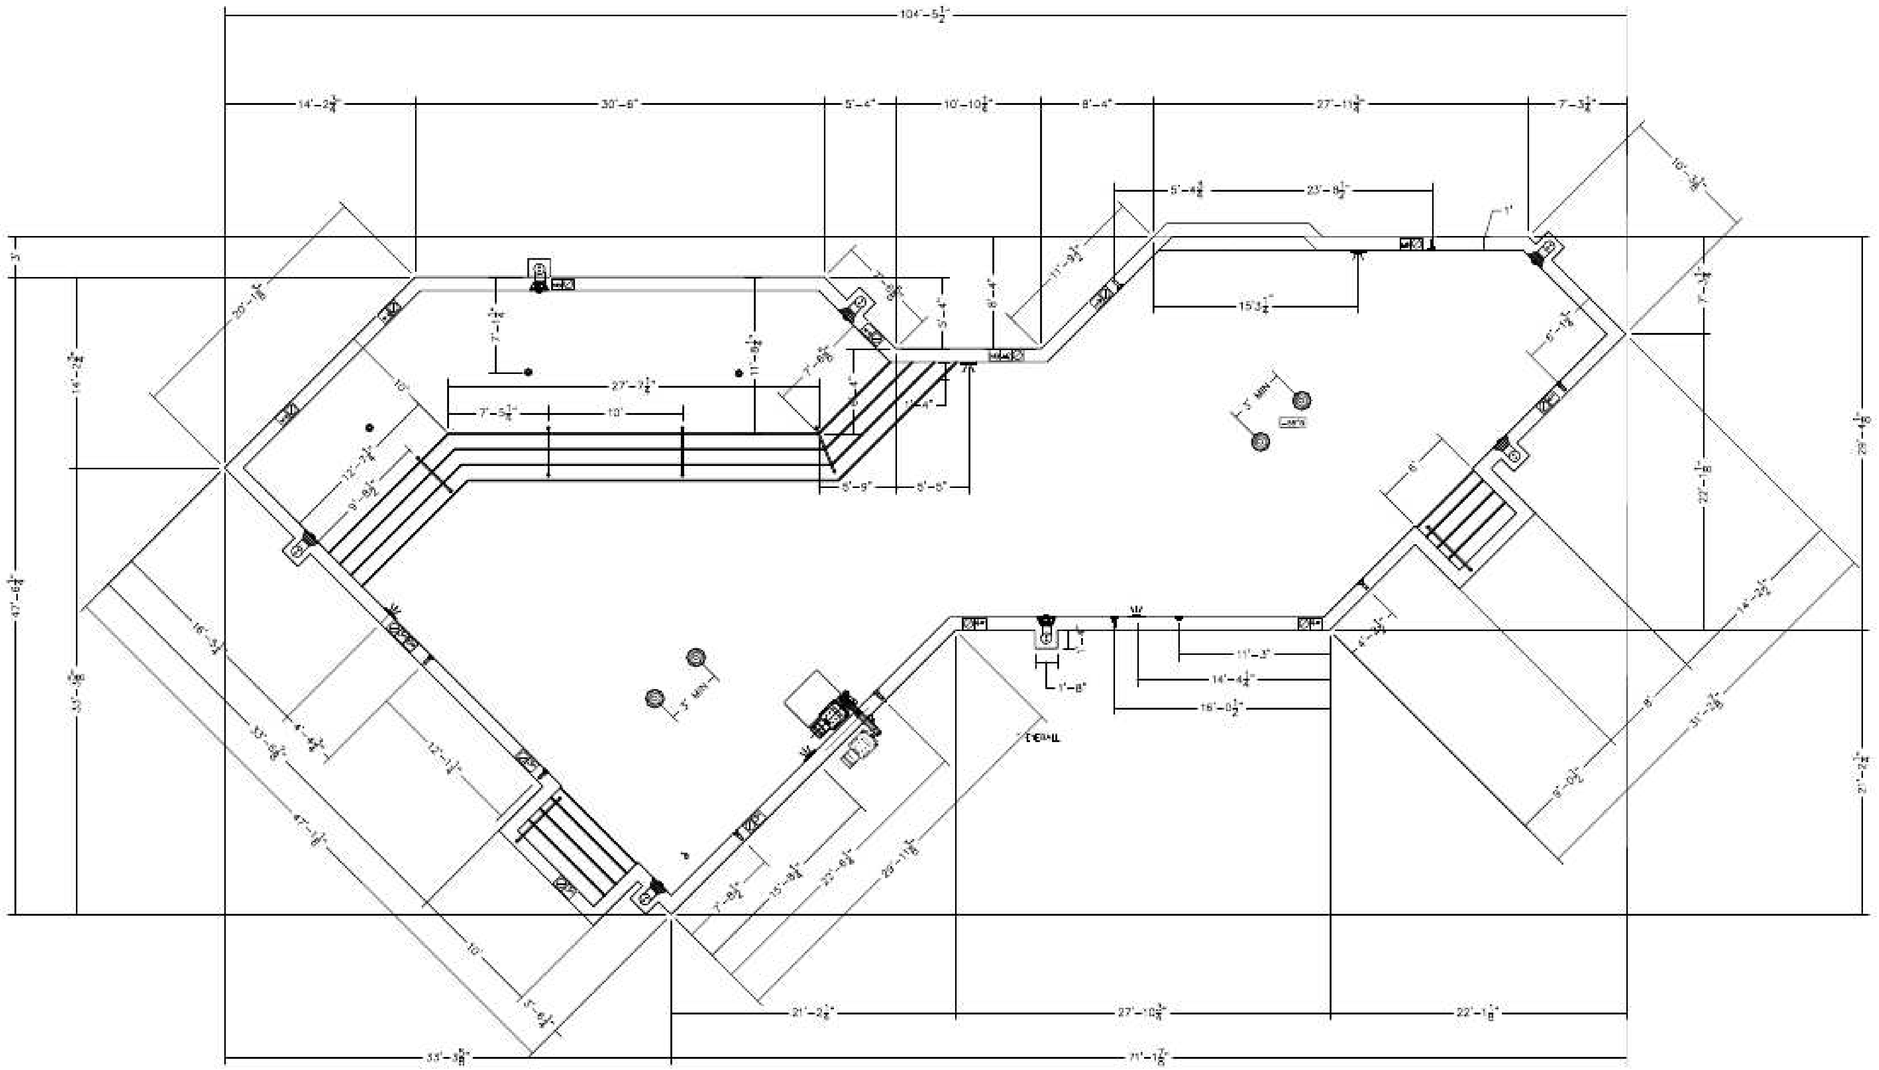

1 POOL PIPE PLAN
Scale: 3/16" = 1'0"

Carolina Pools LLC
1062 S. Batesville Rd.
Greer, SC 29650
TEL: (864) 655 7016
CAROLINAPOOLSLLC.COM

CLIENT
DR.HORTON

ADAMS GLEM - SWIMMING POOL
ASHMORE BRIDGE ROAD MAULDIN SC


NO.	EMISSIONS & REVISIONS	DATES

SEAL:

Drawing Name:
POOL SHELL DIMENSIONS

PROJECT NO: 019

DESIGN BY:	PAUL	DRAWING NO.	
SCALE:	3/16" = 1'0"		SP-3
DRAWN BY:	IVAN		
VERIFY BY:	PAUL		
START DATE:	20 JAN 2024	REVISION #	00

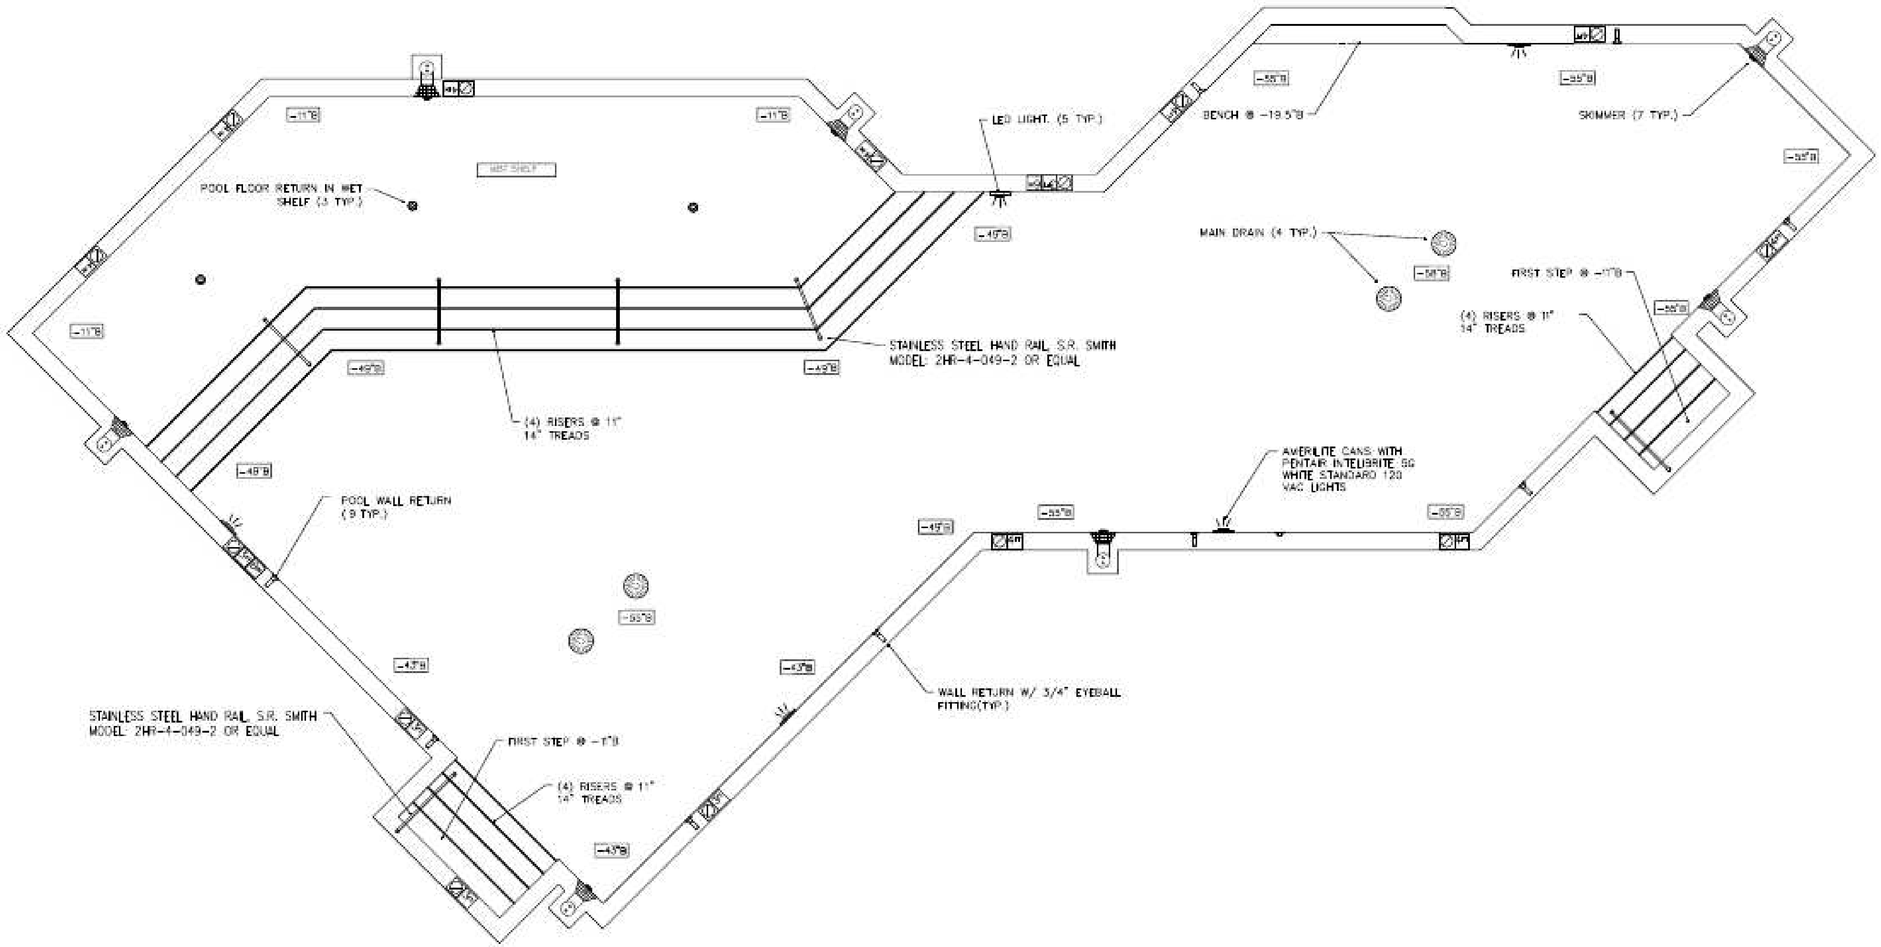

1 POOL PIPE PLAN
Scale: 1/4" = 1'0"

Carolina Pools LLC
1062 S. Batesville Rd.
Greer, SC 29650
TEL: (864) 655 7016
CAROLINAPOOLSLLC.COM

CLIENT
DR.HORTON


ADAMS GLEM - SWIMMING POOL
ASHMORE BRIDGE ROAD MAULDIN SC

NO.	EMISSIONS & REVISIONS	DATES

SEAL:

Drawing Name:
POOL SHELL LAYOUT

PROJECT NO:	019
DESIGN BY: PAUL	DRAWING NO.
SCALE: 1/4"=1'0"	SP-4
DRAWN BY: IVAN	
VERIFY BY: PAUL	
START DATE: 20 JAN 2024	REVISION # 00

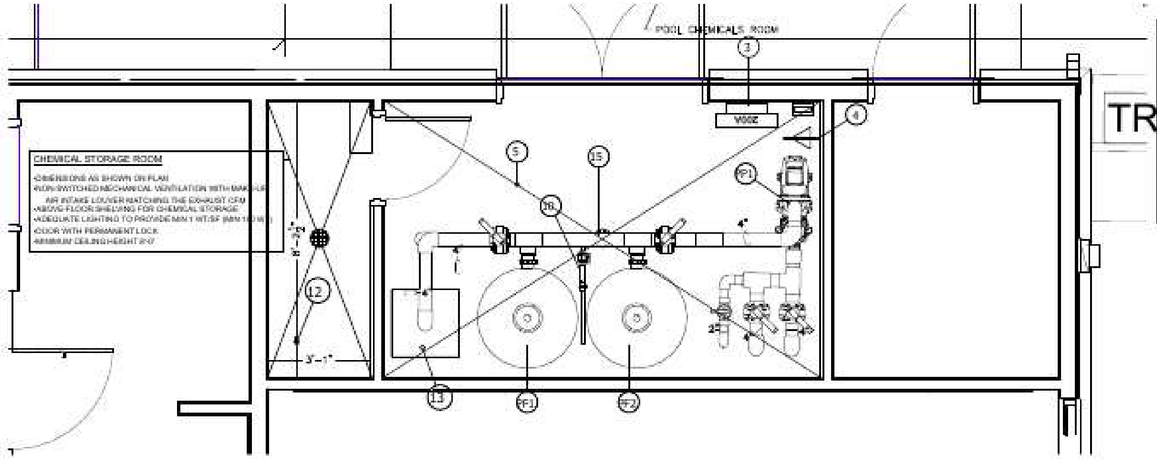


1 POOL EQUIP. ROOM DETAILS
1/4" = 1'-0"
PLAN


POOL DATA	
EQUIPMENT	
PP – POOL FILTER PUMP	HAYWARD HCP3093 3HP MOD: HCP30353
PF1 – POOL FILTER #1	PENTAIR "R1140C-3 SAND FILTER
PF2 – POOL FILTER #2	PENTAIR "R1140C-3 SAND FILTER
SANITATION EQUIPMENT	
CR – CHLORINATOR	RAINBOW MOD: 3015 EROSION CHLORINATOR


POOL EQUIP. RM. DETAILS	
1	CEILING HEIGHT MUST BE 8' MIN.
2	
3	ELECTRICAL PANELS–BY OWNER
4	HOSE BIB–BY OWNER
5	SLOPE FLOOR AT 1/4" PER FT. TO FLOOR DRAIN.
6	FLEX WATER BLUE PIPE 4"
7	
8	POOL LIGHT JUNCTION BOX
9	
10	MAKE UP WATER CONNECTION. PROVIDE BACKFLOW PREVENTOR PRIOR TO CONNECTION.(AUTOFIL SOLENOID)–BY OWNER
11	
12	CHEMICAL STORAGE
13	SUMP W/ DRAIN IN BOTTOM
15	FLOOR DRAIN, W/ 4" PIPE, TYP SEE DETAIL 1/P5.1 FOR BACKWASH LINE

POOL ELECTRICAL REQUIREMENTS			
QUANTITY	EQUIPMENT	ELECTRICAL LOAD PER EACH	INSTRUCTIONS
1	3 HP POOL PUMP	230–230/460V, 9.2–8.3/4.5A 3PH	PROVIDE DISCONNECT WITHIN SFT OF PUMP
5	LED UNDERWATER LIGHTS	PENTAIR 80300 300 WATT EQUIVALENT	PROVIDE WALL SWITCH AT OWNERS REQUESTED LOCATION

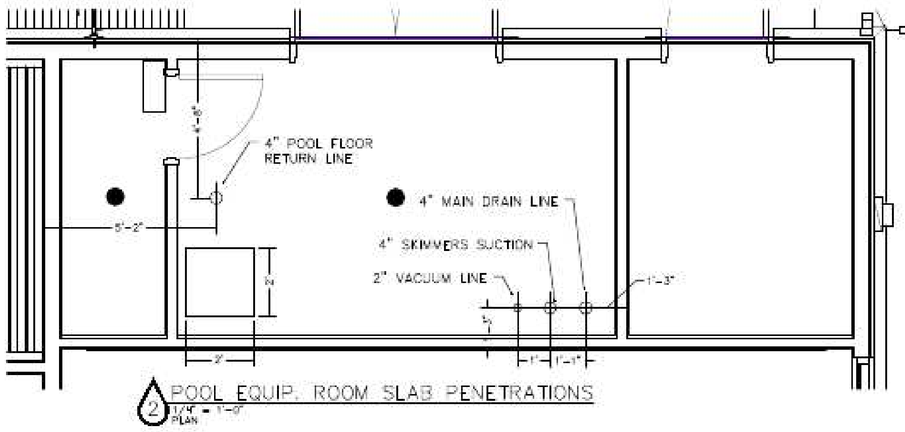

2 POOL EQUIP. ROOM SLAB PENETRATIONS
1/4" = 1'-0"
PLAN

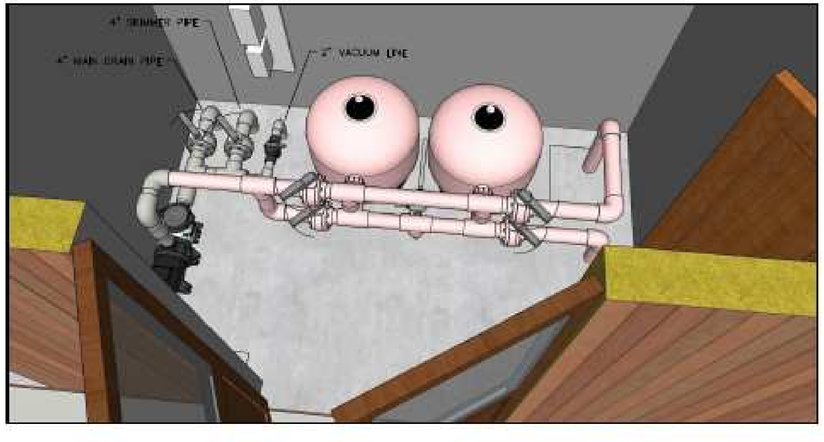

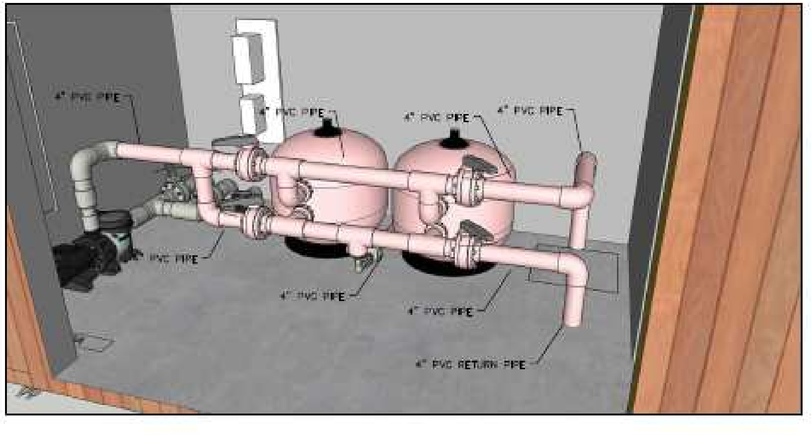

1 POOL EQUIP. ROOM ISOMETRIC
Scale: 1/4" = 1'0"

Carolina Pools LLC
1062 S. Batesville Rd.
Greer, SC 29650
TEL: (864) 655 7016
CAROLINAPOOLSLLC.COM

CLIENT
DR.HORTON

ADAMS GLEM - SWIMMING POOL
ASHMORE BRIDGE ROAD MAULDIN SC

NO.	EMISSIONS & REVISIONS	DATES

SEAL:

Drawing Name:
POOL EQUIPMENT ROOM

PROJECT NO: 019

DESIGN BY:	PAUL	DRAWING NO.	SP-5
SCALE:	1/4" = 1'0"		
DRAWN BY:	IVAN		
VERIFY BY:	PAUL		
START DATE:	20 JAN 2024	REVISION #	00

POOL SPECIFIC SPECIFICATIONS

SWIMMING POOL DESIGN DATA

1. POOL DATA
   VOLUME - 61,700 GALLONS
   MINIMUM CIRCULATION RATE FOR 6 HR TURNOVER = 172 GPM
   PERIMETER = 398 LF
   SURFACE AREA = 2,955 SF

2. CIRCULATION/FILTRATION

	CLEAN FILTER	DIRTY FILTER
200,000 FLOW TURBOWIN	192 GPM AT 30 FT TDH 4.7 HRS	192 GPM AT 50 FT TDH 4.88 HRS

3. PROVIDE 2 SAND FILTERS, WITH 13.90 SF OF FILTER AREA EACH, WITH THE FOLLOWING ALLOWABLE FILTRATION RATE: 7.66 SF AT 15 GPM/SF (SEE NOTE 2) = 105 GPM EA. TOTAL ALLOWABLE FILTRATION OF 210 GPM.

4. BATHER LOAD
   WATER DEPTH >5FT: 2000 SF POOL AREA/15 SF PER PERSON = 131 SWIMMERS

EQUIPMENT & FITTINGS

5. PROVIDE THE FOLLOWING EQUIPMENT
   PPE (SEA): PENTAIR TYPHOON 2 SAND FILTER RATED AT 100 GPM EACH AT 15 GPM/SF MEDIA PROVIDE PRESSURE GAUGE AIR RELIEF VALVE AND BASKET GLASS ON FILTER
   PPE (SEA): PENTAIR 2 HP HCP28521 - MODEL: HCP28521, FULL RATED, SINGLE PHASE 208/230V
   CR (SEA): EROSION CHLORINATOR, PENTAIR PAMBIEN HIGH CAPACITY COMMERCIAL FEEDER, MODEL: HCO318

6. PROVIDE THE FOLLOWING FITTINGS
   FD (2): AQUASTAR STEP, MODEL: 614 STEP, 12" SQUARE GRATE A PVAMF RATED AT 160 GPM AT 2.1 FPS ON ADJUSTERS (4" ADJUST), LAMP WITH 2" EGG OUTLET. PROVIDE (1) AQUASTAR DELPCOM HANDS HYDRO STATIC SWEEP VALVE ASSEMBLY
   R1 (4): WALL RETURNS, AQUASTAR MODEL: 6331, 1.5" THREE PIECE DIRECTIONAL EYEBALL FITTINGS
   R2 (3): FLOOR RETURNS: AQUASTAR 2" ADJUSTABLE FITTINGS (6 INST SHELF INSERT WITH 2"O.D. X 2" ADAPTERS
   S (7): AQUASTAR FLUSH SKIMMERS MODEL #SKF300-2" OUTLET, PROVIDE OMNI SPARE SKIMMER STRAINER ASSEMBLY
   VI (1): PREWIRED IP1003 CAUSIN FITTING WITH WATERTIGHT VAC LOCK COVER.

7. PROVIDE HOP SEAL ON ALL PUMPS, FILTER, CHLORINATORS AND SKIMMERS

FINISHES AND ACCESSORIES

8. PROVIDED THE FOLLOWING POOL FINISHES:

POOL PLASTER:	WHITE MARCITE
COPING:	PAVERS IN PLACE CAST-IN-PLACE CONCRETE
WATERLINE TILE:	SEMI 6" HIGH

9. PROVIDE THE FOLLOWING ACCESSORIES AND INCIDENTALS/ EQUIPMENT POOL
   (6 WALL STEP HANDRAIL, SWIMATH JENKINS (10) 1.90" DIA X .065" TYPE 304 STAINLESS STEEL, WITH WEDGE ANCHORS AND STAINLESS STEEL ESCUTCHEONS, LENGTH AS SHOWN ON DRAWINGS

GENERAL NOTES

1. ALL WORK SHALL CONFORM TO THE MOST CURRENT EDITION OF THE "REGULATION 61-51 PUBLIC SWIMMING POOLS" AS PUBLISHED BY THE SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL, AND ALL APPLICABLE STATE AND LOCAL MECHANICAL REGULATIONS AS WELL AS THE MOST CURRENT EDITION OF THE INTERNATIONAL SWIMMING POOL AND SPA CODE.
2. CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND SITE CONDITIONS PRIOR TO STARTING WORK AND SHALL NOTIFY THE ENGINEER OF ANY DISCREPANCIES OR PROPOSED MODIFICATIONS.
3. REFER TO POOL DRAWING FOR PLUMBING, ELECTRICAL, POOL EQUIPMENT, SITE DRAINAGE AND OTHER POOL REGULATED INFORMATION.
4. KEEP EXCAVATIONS FREE OF STANDING WATER AND KEEP TIME BETWEEN EXCAVATION AND SHOOTING GUNITE/SHOTCRETE TO A MINIMUM.

MATERIALS

1. GUNITE/SHOTCRETE SHALL BE PNEUMATICALLY PLACED AND SHALL ATTAIN A MINIMUM COMPRESSIVE STRENGTH OF 4,000 PSI AT 28 DAYS.
2. ALL GUNITE/SHOTCRETE WORK SHALL BE PERFORMED PER THE LATEST EDITION OF THE GUNITE CONTRACTORS ASSOCIATION "GUNITE & SHOTCRETE"
3. CONCRETE REINFORCING STEEL SHALL COMPLY WITH ASTM A615, GRADE 60. CONTINUOUS BARS SHALL LAP 40 BAR DIAMETERS, MINIMUM.
4. MINIMUM GUNITE/SHOTCRETE/CONCRETE COVER FOR REINFORCEMENT
   3" - SIDES AND BOTTOMS OUT AGAINST EARTH OR AS EQUIVALENT.
   "SUPPORT ON SUITABLE PLASTIC CHAIRS, WIRE CHAIRS, OR HALF CONCRETE BRICKS ON SIDE AT AN ADEQUATE SPACING SO THAT REINFORCING DOES NOT SHIFT DURING CONCRETE PLACEMENT
   2" - ALL OTHER SURFACES
5. THE CONTRACTOR SHALL FIELD VERIFY THE LOCATION AND TYPE OF ALL EMBEDDED ITEMS INCLUDING CONDUIT, SLEEVES, PIPES, ANCHOR BOLTS, ETC., PRIOR TO SHOOTING GUNITE/SHOTCRETE OR PLACING CONCRETE
6. POOL SHELL SHALL BE ON FIRM, DRY/ROCK, UNDISTURBED SOIL WITH A MINIMUM 1,500 PSI ALLOWABLE SOIL BEARING PRESSURE. A MINIMUM 8" THICK WELL GRADED STONE COMPACTED BASE SHALL BE INSTALLED UNDER THE POOL SHELL.

SPECIFICATIONS

GENERAL

1. THIS IS AN OUTDOOR, IN-GROUND COMMERCIAL FACILITY, CONSISTING OF A POOL AND EQUIPMENT ROOM, CHEMICAL STORAGE ROOM AND TOILETS.
2. POOL CONSTRUCTION TO COMPLY WITH "REGULATION 61-51, PUBLIC SWIMMING POOLS" ISSUED BY SOUTH CAROLINA DEPARTMENT OF HEALTH AND ENVIRONMENTAL CONTROL.
3. THE DESIGN OF THIS AQUATIC FACILITY COMPLIES WITH THE REQUIREMENTS OF THE ADMINISTRATIVE 1119.1 & 1140 AND THE IPSC RULES GOVERNING PUBLIC SWIMMING POOLS.
4. PROVIDE (1) 0.5 HMTH MUSCO ASA (COMPLIMP LIFT (SEE PLAN)

POOL CONSTRUCTION

5. ALL POOL FLOORS TO MAINTAIN 6" THICK, 4,000 PSI GUNITE WITH GRADE 60 REBAR, CENTERED IN THE GUNITE, ALL REINFORCING MINIMUM REBAR AT MAX 12" OC EACH WAY. INSTALL REINFORCING AS FOLLOWS:
   5.1. MIN 4 BAR DIAMETER RADIUS ON ALL BENDS.
   5.2. EXTEND VERTICAL REBAR MIN 24" (FIRST BEND) INTO FLOOR SLAB AND TIE TO FLOOR STEEL.
   5.3. ALL SKIP SPLICES MIN 30 BAR DIAMETERS IN LENGTH.
   5.4. VERTICAL WALLS SHALL NOT EXCEED 11 DEGREES FROM PLUMB. CORNERS FORMED BY INTERSECTION OF WALLS AND FLOORS SHALL BE 3 RADIUS OR TAPERED.
6. PLACE POOL FLOOR ON 6" THICK COMPACTED 3/4" WASHED STONE ENSURING PRESENCE OF HIGH GROUND WATER UNDER POOL PRIOR TO PLACEMENT OF ANY GUNITE.
7. PROVIDE 1/2" EXPANSION JOINT BETWEEN DECK SLAB AND BACK OF COPING (EXCEPT EDGE OF SPLASH PAD) AND BETWEEN TOP OF ANTERLINE TILE AND UNDERSIDE OF COPING (OVERHANG). SEAL JOINTS WITH RESILIENT SEALANT SIMILAR TO SIKA 1A. SEE DETAIL BREAD OVER DECK (WITH BOND BREAKER BACKER ROD) EXPANSION JOINT FILLER OR TAPE AS RECOMMENDED FOR THE PARTICULAR APPLICATION BY THE SEALANT MFG.
8. PROVIDE ANTERLINE TILE UNDER COPING AROUND ENTIRE PERIMETER OF POOL.
9. PROVIDE STEPS WITH TREAD REINFORCED WITH #4 BAR AT 12" OC EACH WAY. HANDRAIL NON-SLIP FINISH AND 2" BLACK OR DARK COLORED TILE AT ALL STEP NOSING NO MORE THAN 1" BACK FROM FRONT OF RISER.
10. PROVIDE WATER DEPTH AND NO DIVING WARNING TILE MARKERS ON VERTICAL POOL SHELL DEPTH DIALED AT ASTER LINE AND AT DECK EDGE. TO COMPLY WITH REGULATION 61-51.
    SEE PLAN FOR LOCATIONS OF DEPTH MARKER AND NO DIVING MARKER.
    PLACE WARNING TILES AT MINIMUM 25 FT OC AROUND THE POOL PERIMETER, AT POINTS OF MINIMUM AND MAXIMUM DEPTHS AND AT TRANSITION POINTS. PROVIDE 6"X6" DEPTH MARKER TILES WITH MIN 4" HIGH ARABIC LETTERS, (3 CONTRASTING LETTER/BACKGROUND COLORS), INCLUDED ABBREVIATIONS "FT" AND "IN" PROVIDE 4"X6" "NO DIVING" INTERNATIONAL SYMBOL TILE IN PROXIMITY OF 3' WATER DEPTH ON A WHITE BACKGROUND.
    MFG: INLAND (RECOMMENDED) (800) 638-6870 | WWW.INLAYING.COM
    NO DIVING TILE (ON SIDE): 3"X6" #SS01000, DEC SLIP RESISTANT FINISH
    DEPTH MARKER TILE (ON DECK): 6"X6" FT AND IN ARABIC CAL SLIP-RESISTANT FINISH
    DEPTH MARKER TILE (WATERLINE): 6"X6" FT AND IN ARABIC CAL SMOOTH FINISH

POOL SIGNAGE

11. PROVIDE SAFETY SIGNS AND EQUIPMENT

REQUIRED SIGNAGE	REMARKS
"SWIMMING NO LIFE GUARD ON DUTY"	FOR USE IF NO LIFEGUARD ON DUTY MIN LETTER SIZE 3" HIGH
"CHILDREN SHOULD NOT USE THE SWIMMING POOL WITHOUT ADULT SUPERVISION"	MIN LETTER SIZE 1" HIGH
"ADULTS SHOULD NOT SWIM ALONE"	MIN LETTER SIZE 1" HIGH
"NO PETS OR GLASS CONTAINERS ALLOWED IN THE POOL AREA"	MIN LETTER SIZE 1" HIGH
"ALL BATHERS ARE REQUIRED TO SHOWER BEFORE ENTERING THE POOL OR SPA"	VISIBLE UPON ENTERING POOL AREA MIN LETTER SIZE 1" HIGH
"NO OIL, BODY LOTIONS OR MINERALS ALLOWED IN THE WATER"	MIN LETTER SIZE 1" HIGH
"POOL CLOSED"	SIGN AT EACH POOL AREA
"HOURS OF OPERATION..."	ENTRANCE WHEN OPERATION PERMIT IS SUSPENDED MIN LETTER SIZE 2" HIGH
"NO DIVING"	MIN LETTER SIZE 1" HIGH
DIRECTIONS TO EMERGENCY TELEPHONE IF NOT INSIDE POOL AREA	MIN LETTER SIZE 1" HIGH
"USE EMERGENCY TELEPHONE"	SEE SPEC NOTE 13
SIGN LOCATED NEAR SPA AND READING	MIN LETTER SIZE 3 1/2" HIGH

CAUTION

PREGNANT WOMEN, ELDERLY PERSONS, AND PERSON WITH HEART DISEASE, DIABETES OF HIGH OR LOW BLOOD PRESSURE SHOULD NOT ENTER THE SPA WITHOUT PRIOR MEDICAL CONSULTATION AND PRESCRIPTION FROM THEIR DOCTOR.
DO NOT USE THE SPA/HOT TUB WHEN UNDER THE INFLUENCE OF ALCOHOL, TRANQUILIZERS OR OTHER DRUGS THAT CAUSE DROWSINESS OR THAT RAISE OR LOWER BLOOD PRESSURE.
DO NOT USE ALONE
UNSUPERVISED USE BY CHILDREN IS PROHIBITED
ENTER AND EXIT SLOWLY. OBSERVE REASONABLE TIME LIMITS (10-15 MINUTES). THEN LEAVE THE WATER AND COOL DOWN BEFORE RETURNING FOR ANOTHER BRIEF STAY. LONG EXPOSURE MAY RESULT IN NAUSEA, DIZZINESS OR FAINTING.
KEEP ALL BREAKABLE OBJECTS OUT OF THE AREA.

POOL PIPING

12. RECIRCULATING SYSTEM TO MEET REGULATION 61-51

13. ALL PIPING SCHEDULE 80 PVC SPLASH PAD WATER PLAY FEATURE PIPING SHALL BE SCH 80

14. INSTALL PIPING AS CLOSE AS POSSIBLE TO THE LAYOUT SHOWN, WITH FITTINGS AND ACCESSORIES INDICATED

15. PROVIDE ADEQUATELY SIZED CONCRETE THRUST BLOCKING AT ALL CHANGES IN DIRECTION OR SIZE REDUCTIONS OF UNDERGROUND RETURN LINES. DEVIATION SHALL BE EQUAL TO 6" DIAMETER.

16. PROVIDE A POOL OVERFLOW LINE, PIPED FROM BACK DEE SKIMMER OR SKIMMER FITTING IN THE LINE, PIPED TO THE STORM DRAIN

17. DO NOT INSTALL ANY GUARD LIDS. THE POOL PIPING AND MAIN DRAIN SUMPS HAVE BEEN INSPECTED AND APPROVED BY THE HEALTH DEPARTMENT AND THE ENGINEER.

TOILETS AND DRESSING FACILITIES

18. PUBLIC TOILET FACILITIES MEETING REGULATION 61-51 ARE PROVIDED IN THE HOTEL REFER TO BUILDING CONSTRUCTION DRAWINGS AND OTHERS FOR DETAILS FOR OWNERS AND BUILDING CONTRACTORS INFORMATION. THE FOLLOWING IS REQUIRED IN TOILETS PROVIDED FOR POOL AND SPA USE:
    MINIMUM FIXTURES REQUIRED (FOR EITHER ONE OF FACILITY: ITE
    WOMENS BATHROOM: 2 WATER CLOSET, 1 LAVATORY
    MENS BATHROOM: 1 WATER CLOSET, 1 LAVATORY, 1 URINAL
    COMPLY WITH SC IRC/IBC CODE AND ICC A117.1 2009 FOR ALL TOILET ROOM REQUIREMENTS.
    THE WATER HEATER SHALL BE FACCESSIBLE TO USERS. SET THE HOT WATER SUPPLY TEMPERATURE TO LAVATORIES AND SHOWERS AT MAX 120 F. (NOM)
    NON-GLASS SOAP DISPENSERS (LIQUID OR POWDERED ONLY) AT EACH LAV & SHOWER
    EASTERN/DOOR MIRRORS. PROVIDE GLASS CERTIFICATION OR EQUIVALENCE SAFETY BACKING TAPE IN BACK OF GLASS
    TOILET PAPER HOLDER AT EACH ENTRY CLOSET
    SLIP-RESISTANT FLOORS. SLOPED AT 1/4" PER FT TO FLOOR DRAIN
    HOSE BIBS LOCATED SUCH THAT EACH TOILET ROOM CAN BE REACHED WITH A 50 FT HOSE
    FLOOR DRAIN REQUIRED IN EACH TOILET ROOM

EMERGENCY TELEPHONE

19. PROVIDE A PERMANENTLY AFFIXED TELEPHONE, EITHER INSIDE THE POOL ENCLOSURE OR WITHIN 75 FT OF EACH POOL ENTRANCE, WHICH IS CAPABLE OF DIRECT DIALING 911 OR AN EMERGENCY NOTIFICATION SYSTEM AND IS READILY ACCESSIBLE TO ALL POOL USERS. POST A SIGN IN THE POOL AREA IDENTIFYING THE LOCATION OF THE TELEPHONE. POST A SIGNAGE THE TELEPHONE LISTING DIALING INSTRUCTIONS, THE 911 ADDRESS OF THE POOL LOCATION AND THE TELEPHONE NUMBER. COMPLY WITH ICC A117.1 REGARDING THE TELEPHONE INSTALLATION.

DECKS AND WIDE BANDS

20. PROVIDE NON-SLIP CONCRETE DECKS, SLOPED MIN 1/4" PER FT AWAY FROM THE POOL TO DECK AND AREA DRAINS. PROVIDE AN APPROVED AIR GAP (INDIRECT WASTE) ON ALL DRAIN IS EXCHANGE PIPING. SEE CIVIL UTILITY DRAWINGS BY OTHERS FOR DRAIN EXCHANGE PIPING POOL AREA.
21. PROVIDE WIDE BANDS WITH (INCLUDING NOSE (MODULOW PRESENTERS). LOCATED EACH TRAY ALL POSITIONS OF THE DECK CAN BE REACHED WITH A 100 FT HOSE WITHOUT ENTERING THE POOL.
22. HOSE BIBS ARE SHOWN THE PLAN FOR ILLUSTRATIVE PURPOSES. CONTRACTOR MAY VARY THE HOSE BIBS LOCATIONS PROVIDED THE 100 FT HOSE RULE IS MET.
23. TREADING DECKS AND PROVIDE ADDITIONAL REINFORCING PER MFG INSTALLATION INSTRUCTIONS FOR ADA LIFT, STEP HANDRAILS, ANCHORS BEL AND LADDER ANCHORAGES. MAINTAIN ADA LIFT SHOP DRAWINGS ON SITE DURING CONSTRUCTION.
24. MAINTAIN AT LEAST A 5 FT CLEAR DECK AROUND SPACE AROUND THE PERIMETER OF THE POOL, INCLUDING LADDERS AND STEP HANDRAILS. MAINTAIN AT LEAST 4 FT CLEAR DECK WALKING SPACE BETWEEN POOL EDGE AND ANY DECK FURNITURE

LIGHTING

25. UNDERWATER LIGHTS SHOWN ARE DESCRIPTIVE PURPOSES ONLY. SEE BUILDING ELECTRICAL DRAWINGS FOR LIGHTING COMPLIANCE.
26. PROVIDE PENTAIR INTELLIBRITE 5G WHITE LED UNDERWATER LIGHTING MODEL: 6100, 3600 LUMENS EACH PER PLAN. COMPLY WITH CURRENT EDITION OF THE NATIONAL ELECTRICAL CODE REGARDING ALL WIRING AND GROUNDING OF UNDERWATER LIGHTS. PROVIDE ANIMBLITE NICHES.

GFCI PROTECTION


27. ALL GROUND LEVEL BUILDING DOOR AND WINDOWS OPENING INTO THE POOL ENCLOSURE MUST BE SELF CLOSING OR CHILD PROTECTED BY A BARRIER OR AUDIBLE ALARM.

PROVIDE THE FOLLOWING MAINTENANCE EQUIPMENT:

28. VACUUM CLEANER HEAD (1/7)
(1) VACUUM HOSE - 1 1/2" X 30'
(1) BRUSH - 18"
(1) LEAF SKIMMER (NET TYPE
(1) POLE - 12' TELESCOPIC
(1) THERMOMETER AND TWO (2) SPARE TEST KIT
29. PROVIDE (1) UNIT OF LIFE SAVING EQUIPMENT. TO INCLUDE:
(1) SHEPHERDS CROOK (UPSTREAM AND MIN 4 PIPE DIAMETERS DOWNSTREAM.
(1) SHEPHERDS CROOK STYLE BODY HOOK ATTACHED TO 30FT OF NON TELESCOPING POLE
PERMANENTLY MOUNT LIFE SAVING UNITS INSIDE POOL ENCLOSURE, CONVENIENT TO THE POOL

EQUIPOTENTIAL BONDING

30. THE EQUIPOTENTIAL BONDING REQUIRED BY THIS SECTION IS INTENDED TO REDUCE VOLTAGE GRADIENTS IN THE POOL AREA THE FUNCTION OF EQUIPOTENTIAL BONDING DIFFERS FROM THE POOL BONDING REQUIREMENTS OF ARTICLE 680 IN THAT IT IS NOT TO PROVIDE A PATH FOR GROUND FAULT CURRENT BUT IS TO ESTABLISH EQUAL ELECTRICAL POTENTIAL (VOLTAGE) IN THE VICINITY OF THE POOL, INCLUDING THE POOL WATER.
31. THE EQUIPOTENTIAL BONDING SYSTEM IS NOT REQUIRED TO BE EXTENDED OR ATTACHED TO REMOTE PANEL BOARDS, SERVICE EQUIPMENT, OR ELECTRODES.
32. PROVIDE POOL EQUIPOTENTIAL BONDING IN ACCORDANCE WITH NEC ARTICLE 680 (NOM) AND THE FOLLOWING DETAIL AND NOTES.

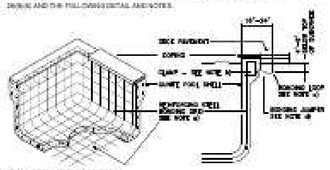

DETAIL NOTES FOR LOOPS IN SHELLS

a) POOL SHELL REINFORCED AT MAX 12" OC HORIZONTALLY AND VERTICALLY. WIRE-TIED WITH STEEL WIRE AT EACH REBAR CROSSING AND SPLICE.
b) BOND POOL REINFORCING TO #3 BARE SOLID COPPER WIRE WITH #10 CAPTIVES, EQUALLY SPACED AROUND POOL PERIMETER. CONNECTED COPPER TO REBAR WITH UL LISTED PRESSURE TYPE CONNECTORS/CLAMPS. LABELED AS SUITABLE FOR CONCRETE ENCASEMENT. CONNECT COPPER TO COPPER CONDUCTORS WITH UL LISTED PRESSURE TYPE CONNECTORS/CLAMPS. LABELLED AS SUITABLE FOR THE LOCATIONS IN WHICH THEY ARE USED (NEC 680.26(B)(1)(A))


BONDING NOTES PERIMETER SURFACES (DECK)

a) PROVIDE #8 BARE SOLID COPPER BONDING LOOP, CONTINUOUSLY AROUND POOL PERIMETER AT MIN 18" TO MAX 24" FROM INSIDE OF POOL SHELL AND IS RIGID 6" TO 8" BELOW TOP OF RUBBERIDE UNDER POOL DECK (600 SHELL BE ATTACHED TO THE POOL REINFORCING STEEL OR COPPER CONDUCTOR (2ND AT A MINIMUM OF FOUR POINTS (APPROX) SPACED AROUND THE PERIMETER OF THE POOL. (NEC 680.26(B)(2)(C))
b) PROVIDE #8 BARE SOLID COPPER BONDING JUMPER, WITH CONNECTORS AS NOTED IN ITEM (E), BOND ALL METALLIC PARTS OF THE POOL TO THE BONDING LOOP INCLUDING HANDRAILS, LADDERS, ADA LIFT #8 CHOPPER AND ALL EQUIPMENT ASSOCIATED WITH AND OF THE POOL (NEC POOL COVER OPERATOR)
c) THE REQUIRED 5 SQ IN CONDUCTIVE SURFACE AREA FOR POOL WATER IS SATISFIED BY THE BONDING OF THE ABOVE METALLIC POOL ACCESSORIES.
d) THE SPECIFIED LED UNDERWATER LIGHTS HAVE PLASTIC NICHES AND ARE A COMPLETE "NON-METALLIC LOW VOLTAGE LIGHTING SYSTEM, NOT REQUIRING BONDING OR GROUNDING WHEN USED WITH THE LISTED 100 VOT OR 300 VOT TRANSFORMERS.

33. DO NOT COVER ANY BONDING WORK UNTIL INSPECTED AND APPROVED

FENCING

34. COMPLY WITH REGULATION 61-51 (A) DESCRIBED BELOW. SUBMIT COMPLETE DETAILS ON ALL FENCING TO THE HEALTH DEPARTMENT FOR ALL APPROVAL TO INSTALLING FENCING.

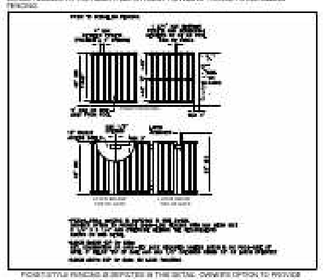

FENCE STYLE FENCING IS DEPICTED IN THE DETAIL. OVERVIEW OPTION TO PROVIDE CHAIN LINK FENCING WITH MAX MESH SIZE OF 2 1/4" X 2 1/4" AND OTHERWISE MEETING THE REQUIREMENTS SHOWN ON THIS DETAIL.
LATCH BELOW TOP OF GATE.
KEY COMBINATION OF CARD KEY LOCK REQUIRED (SEE BELOW) LATCH IS ON POOL SIDE OF GATE, 3" BELOW TOP OF GATE AND MAX 1/2" OTHERWISE WITHIN 18"/18" LATCH OPERATION.
LATCH ABOVE TOP OF GATE: NO LOCK REQUIRED

INSPECTIONS AND PROJECT CLOSEOUT

35. THE ARCHITECT IS REQUIRED TO MAKE THE FOLLOWING INSPECTIONS
    INSPECT ALL PIPING AND GUNITE REINFORCING BEFORE IT IS COVERED
    INSPECT AND VERIFY DRAIN SUMP DIMENSIONS, PIPE SIZES AND COVER MODEL NUMBERS
    PERFORM A FINAL INSPECTION AND CERTIFY TO THE HEALTH DEPARTMENT THAT THE FACILITY WAS CONSTRUCTED ACCORDING TO THE APPROVED DRAWINGS

POOL EQUIPMENT ROOM NOTES

POOL EQUIPMENT ROOM

1. PROVIDE THE FOLLOWING:
   1.1. NON-SWITCHED MECHANICAL VENTILATION WITH A MAKE-UP AIR INTAKE LOUVER MATCHING THE EXHAUST CFM
   1.2. ADEQUATE ILLUMINANCE
   1.3. MIN 8'-0" CEILING
   1.4. 3'-0" DOUBLE DOOR WITH PERMANENT LOCK
   1.5. CONCRETE FLOOR SLOPED AT 1/4" PER FT TO FLOOR DRAINS
   1.6. HOSE BIB WITH A VACUUM BREAKER BACKFLOW PREVENTER
   1.7. NO CHEMICAL STORAGE IS ALLOWED WITHIN THE EQUIPMENT ROOM.
2. LAYOUT EQUIPMENT ROOMS, PIPING AND EQUIPMENT AS CLOSELY AS POSSIBLE TO THE DESIGN SHOWN. CONFIRM CRITICAL DIMENSIONS OF ALL EQUIPMENT AND FITTINGS WITH MANUFACTURER'S LITERATURE.
   DO NOT MAKE MAJOR DEVIATIONS FROM THE PLAN WITHOUT PRIOR APPROVAL OF THE ENGINEER OR THE HEALTH DEPARTMENT.
3. PERMANENTLY AND CLEARLY LABEL ALL EQUIPMENT ROOM PIPING WITH PIPE USE (DRAIN, SKIMMER, RETURN, ETC.) AND DIRECTION OF FLOW.
4. ADEQUATELY SUPPORT PIPING IN THE EQUIPMENT ROOM AS RECOMMENDED BY THE PIPE MFG.
5. PROVIDE POOL MAKE-UP WATER, PROTECTED BY AN APPROVED BACKFLOW PREVENTER.
6. MAKE-UP WATER TO BE PURVEYED BY BUILDING DOMESTIC WATER SYSTEM. PIPED INTO THE RECIRCULATION SYSTEM IN THE EQUIPMENT ROOM, CONTROLLED BY ALL VALVE. PROVIDE A BACKFLOW PREVENTER ON THE INCOMING WATER SERVICE MEETING THE RULES OF THE LOCAL MUNICIPALITY AND THE HEALTH DEPARTMENT FOR BOTH MODES OF WATER.
   THE FOLLOWING TYPE SHALL BE INSTALLED PRIOR TO CONNECTION TO POOL PLUMBING:
   PRESSURE TYPE ANTI-SIPHON VACUUM BREAKER (ASSE 1020 OR 1056)
7. FOR ALL PUMPS, PROVIDE A RATE OF FLOW METER ON THE RETURN SIDE OF EACH PUMP INSTALLED WHERE SHOWN ON PLAN, WITH MIN 10 PIPE DIAMETERS LENGTH OF STRAIGHT PIPE UPSTREAM AND MIN 4 PIPE DIAMETERS DOWNSTREAM.
   PROVIDE BLUE-WHITE MODEL P-1000SP, FOR 2" HORIZONTAL PIPE (ACCURATE TO 1 GPM +/- OF THE ACTUAL FLOW OVER THE FULL RANGE)
8. PROVIDE A SPARE HAYWARD STRAINER FOR FOR EACH PUMP PER AND A SPARE CARTRIDGE FOR EACH FILTER.
9. PERMANENTLY BOLT PUMPS AND FILTERS TO CONCRETE SLAB PER THE EQUIPMENT MANUFACTURER'S INSTRUCTIONS.
10. COMPLY WITH NATIONAL ELECTRICAL CODE FOR ALL WORK WITHIN THE EQUIPMENT ROOM, INCLUDING, BUT NOT LIMITED TO:
    10.1. 30" X 48" CLEAR FLOOR SPACE IN FRONT OF AND CENTERED ON ELECTRICAL PANEL PUMP DISCONNECT WITHIN SIGHT OF THE PUMP (CODE COMPLIANT LOCKOUT/TAG)
11. COMPLY WITH NATIONAL ELECTRICAL CODE FOR ALL WORK WITHIN THE POOL AREA, INCLUDING CIRCUITING AND GROUND FAULT PROTECTION.

CHEMICAL STORAGE — SEE PLANS


12. PROVIDE A CHEMICAL STORAGE ROOM AS SHOWN AND AS FOLLOWS:
    12.1. DIMENSIONS AS SHOWN ON PLAN
    12.2. NON-SWITCHED MECHANICAL VENTILATION WITH MAKE-UP AIR INTAKE LOUVER MATCHING THE EXHAUST CFM
    12.3. ABOVE FLOOR SHELVING FOR CHEMICAL STORAGE
    12.4. ADEQUATE LIGHTING FOR CHEMICAL STORAGE
    12.5. ADEQUATE LIGHTING TO PROVIDE MIN 1 WATT (MIN 100WT)
    12.6. DOOR WITH PERMANENT LOCK
    12.7. MINIMUM CEILING HEIGHT 8'-0"

13. REQUIRED CHEMICAL STORAGE AREA IS CALCULATED AS FOLLOWS

POOL EQUIPMENT ROOM

POOL VOLUME = 61,700 GAL.

FIRST 10,000 GAL =	10 SF
REMAINDER AT 1 SF PER 1,000 GAL =	51.2 SF
TOTAL REQUIRED AREA	20.2 SF
AREA PROVIDED:	25 SF

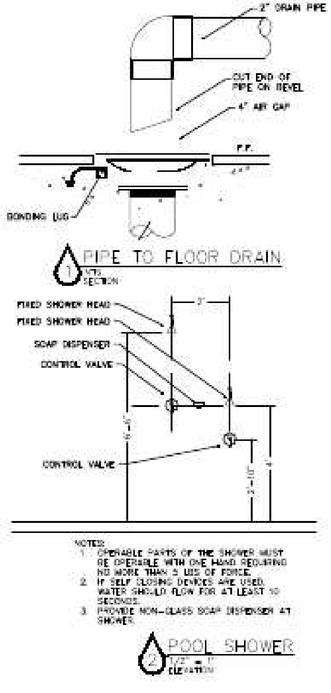

Carolina Pools LLC
1062 S. Batesville Rd.
Greer, SC 29650
TEL: (864) 655 7016
CAROLINAPOOLSLLC.COM

CLIENT
DR.HORTON

ADAMS GLEM - SWIMMING POOL
ASHMORE BRIDGE ROAD MAULDIN SC


NO.	EMISSIONS & REVISIONS	DATES
.	.	.
.	.	.
.	.	.
.	.	.
.	.	.
.	.	.
.	.	.
.	.	.
.	.	.
.	.	.

SEAL:

Drawing Name:

SPECS NOTES AND DETAILS

PROJECT NO:	019
DESIGN BY: PAUL	DRAWING NO.
SCALE: VARIES	SP-6
DRAWN BY: IVAN	
VERIFY BY: PAUL	
START DATE: 20 JAN 2024	REVISION # 00

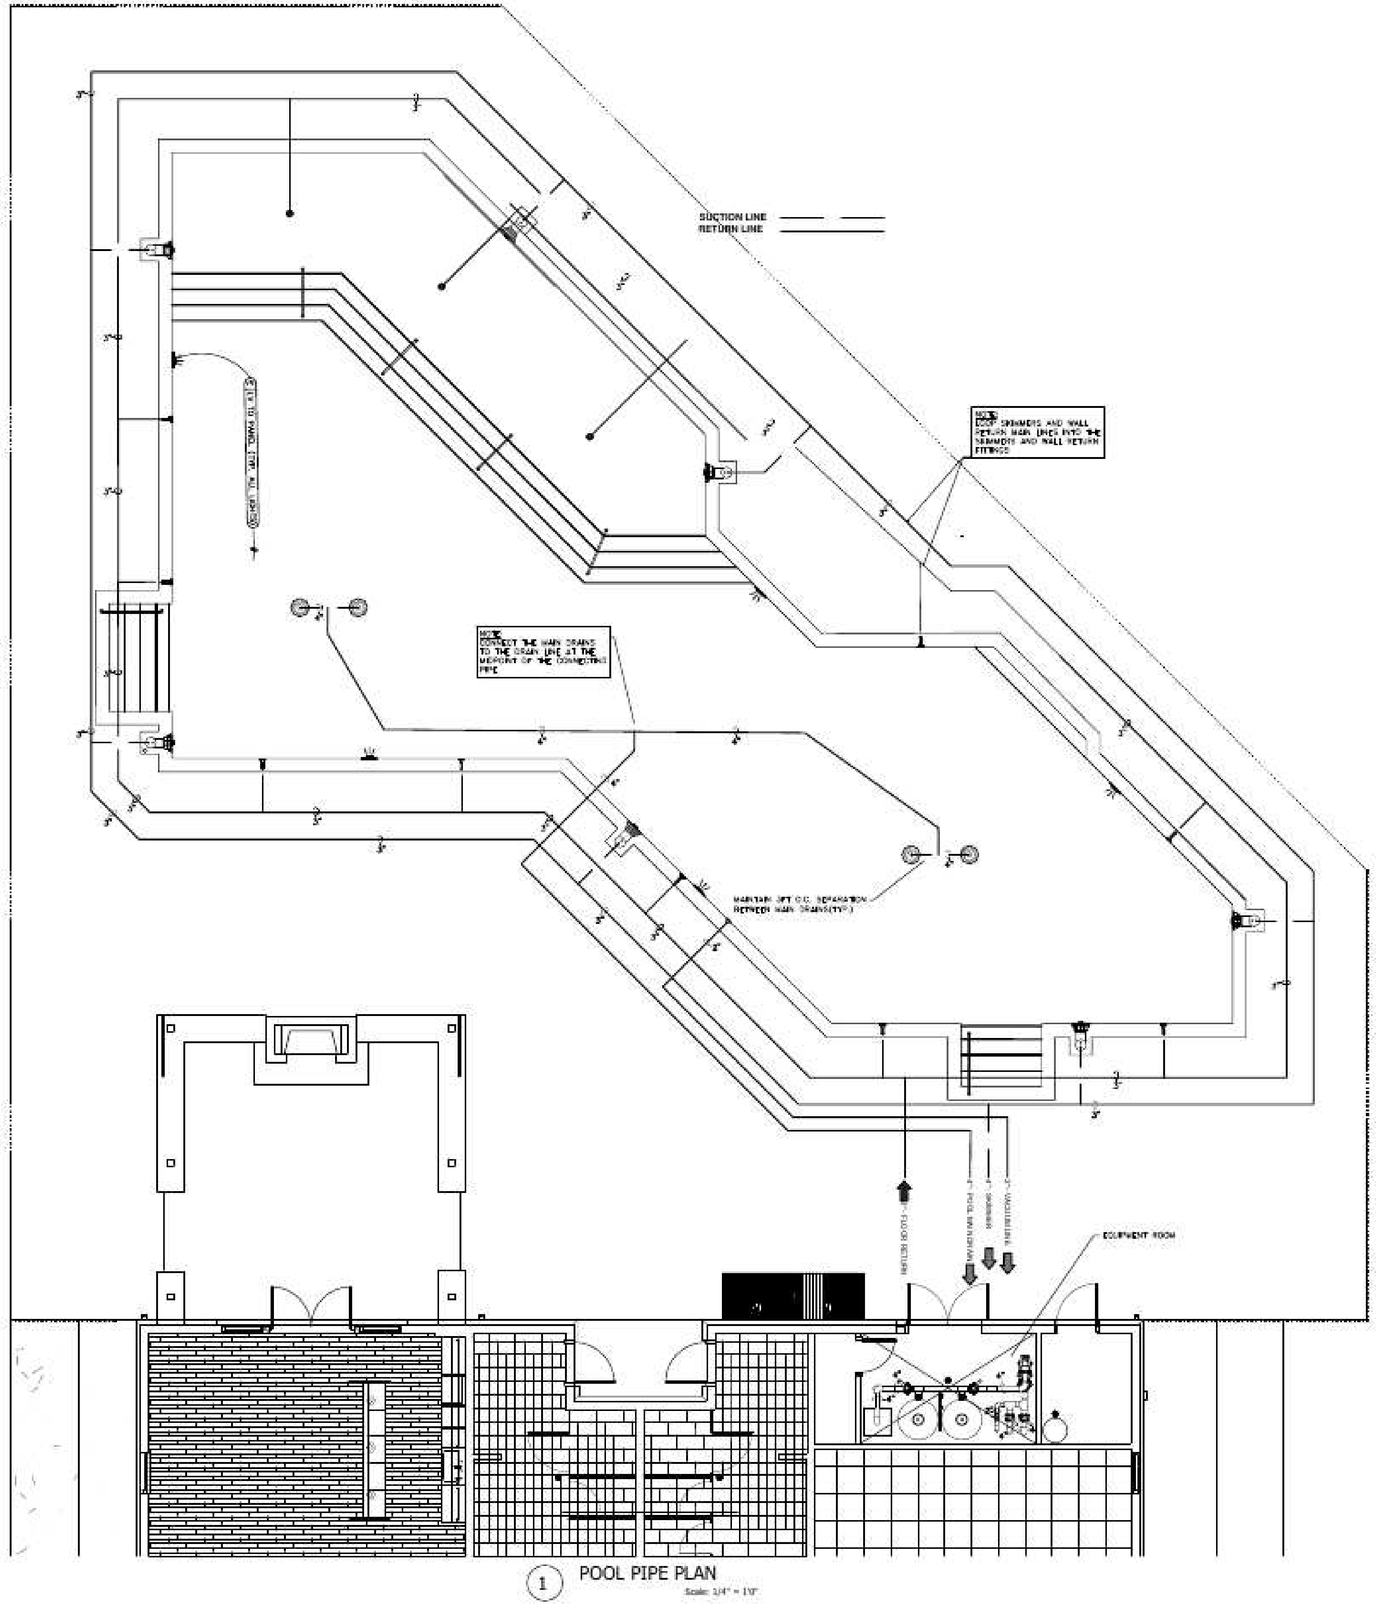

1 POOL PIPE PLAN
Scale: 1/4" = 1'0"

Carolina Pools LLC
1062 S. Batesville Rd.
Greer, SC 29650
TEL: (864) 655 7016
CAROLINAPOOLSLLC.COM

CLIENT
DR.HORTON

ADAMS GLEM - SWIMMING POOL
ASHMORE BRIDGE ROAD MAULDIN SC


NO.	EMISSIONS & REVISIONS	DATES

SEAL:


Drawing Name:
POOL PLUMBING PLAN

PROJECT NO: 019

DESIGN BY:	PAUL	DRAWING NO.	SP-7
SCALE:	1/4" = 1'0"		
DRAWN BY:	IVAN		
VERIFY BY:	PAUL		
START DATE:	20 JAN 2024	REVISION #	00

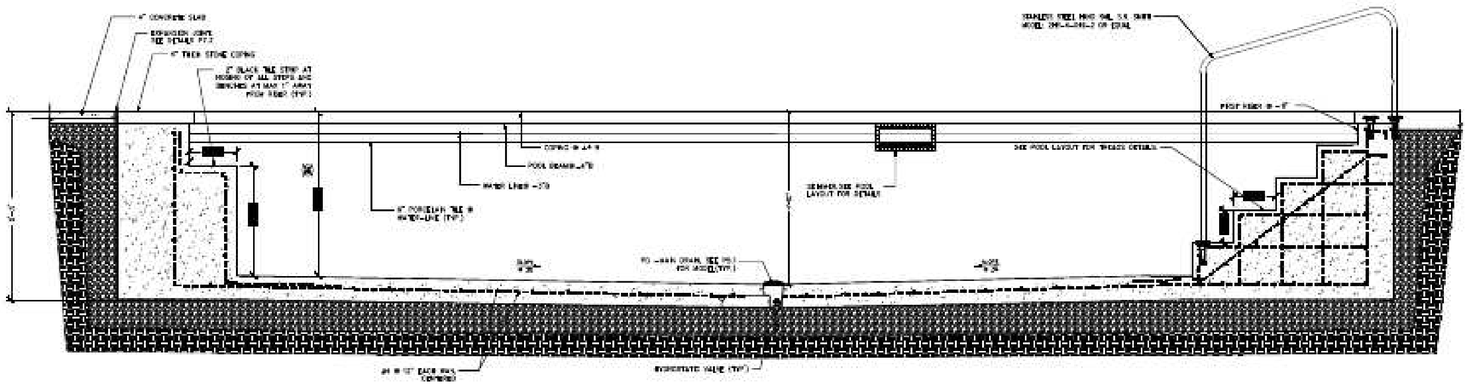

1 POOL SHELL SECTION
1/2" = 1'-0"
SECTION

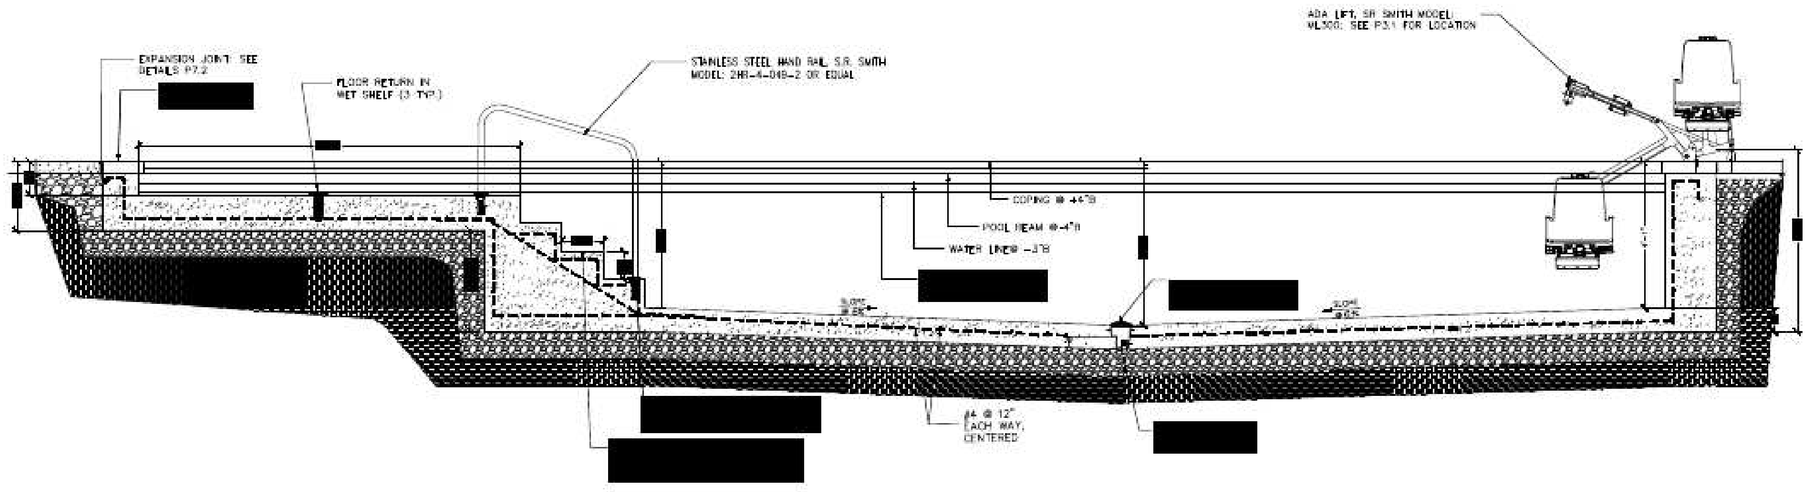

2 POOL SHELL SECTION
1/2" = 1'-0"
SECTION

Carolina Pools LLC
1062 S. Batesville Rd.
Greer, SC 29650
TEL: (864) 655 7016
CAROLINAPOOLSLLC.COM

CLIENT
DR.HORTON


ADAMS GLEM - SWIMMING POOL
ASHMORE BRIDGE ROAD MAULDIN SC

NO.	EMISSIONS & REVISIONS	DATES


SEAL:

Drawing Name:
POOL SECTIONS AND DETAILS


PROJECT NO:	019
DESIGN BY: PAUL	DRAWING NO.
SCALE: 1/2"=1'0"	SP-8
DRAWN BY: IVAN	
VERIFY BY: PAUL	
START DATE: 20 JAN 2024	REVISION # 00

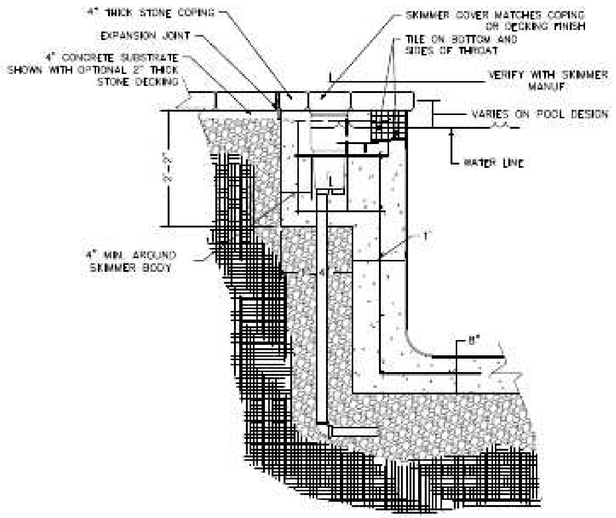


1 SKIMMER & WALL DETAILS TYP.
3/4" = 1'-0" SECTION

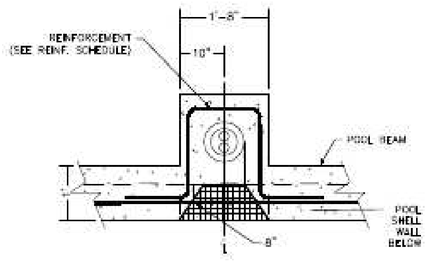


2 SKIMMER DETAILS TYP.
3/4" = 1'-0" SECTION

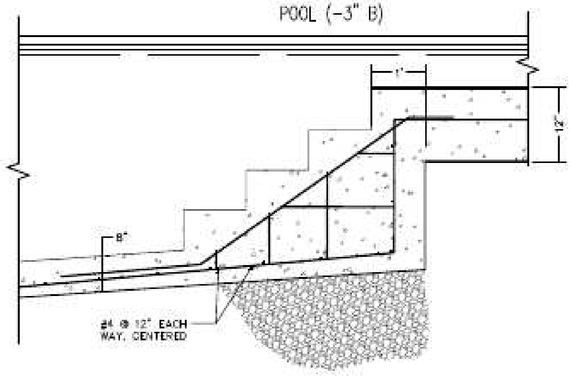


3 STEPS REINF. DETAILS
3/4" = 1'-0" SECTION

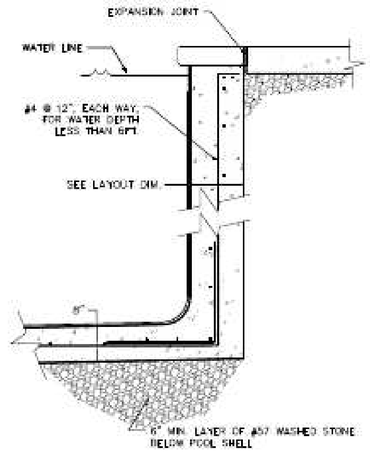

4 SHELL WALL DETAILS TYP.
3/4" = 1'-0" SECTION

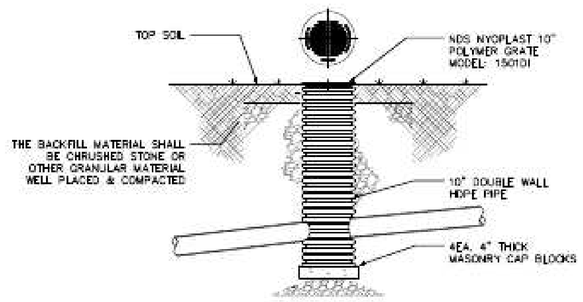



5 TYPICAL CATCH BASIN DETAIL
1/2" = 1'-0" SECTION

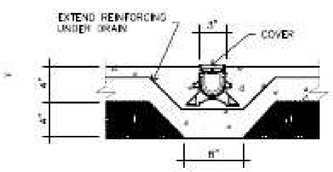


NOTES:
ZURN HDPE TRENCH DRAIN MODEL Z886 WITH ZURN DECORATIVE GRATE, COLOR "TO MATCH DECK" CONTACT ZURN INDUSTRIES (814) 455-0921 OR WWW.ZURN.COM PROVIDE 1 1/2" BOTTOM OUTLET ADAPTERS AND CLOSED END CAPS TIE INTO 4" SCH 40 DRAIN LINE USING WYE AND (2) 45° BENDS AT EACH OUTLET. SEE SITE PLAN FOR CONTINUATION ON EXTERIOR OF BUILDING.


6 TRENCH DRAIN DETAILS
1/2" = 1'-0" SECTION

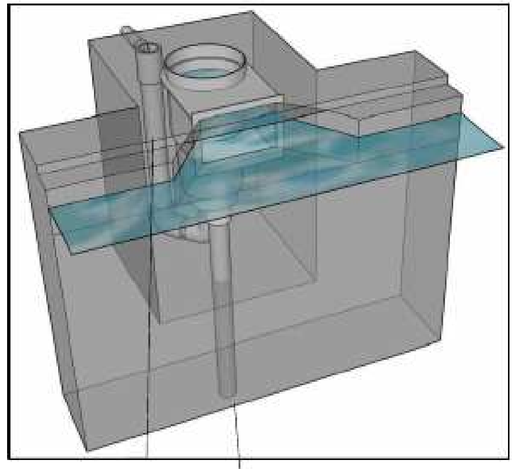

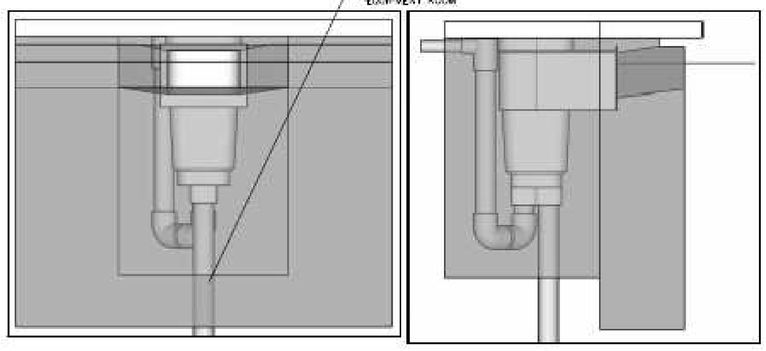

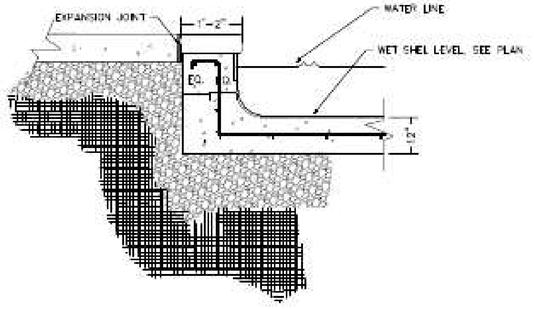

7 BEAM AT WET SHELF DETAIL
3/4" = 1'-0" SECTION

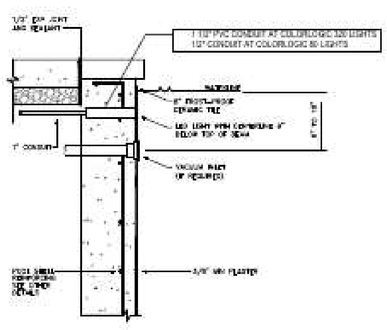

8 VACUUM & LIGHT PLACEMENT

Carolina Pools LLC
1062 S. Batesville Rd.
Greer, SC 29650
TEL: (864) 655 7016
CAROLINAPOOLSLLC.COM

CLIENT
DR.HORTON


ADAMS GLEM - SWIMMING POOL
ASHMORE BRIDGE ROAD MAULDIN SC

NO.	EMISSIONS & REVISIONS	DATES

SEAL:

Drawing Name:
POOL SECTIONS AND DETAILS

PROJECT NO:	019
DESIGN BY: PAUL	DRAWING NO.
SCALE: VARIES	SP-9
DRAWN BY: IVAN	
VERIFY BY: PAUL	
START DATE: 20 JAN 2024	REVISION # 00

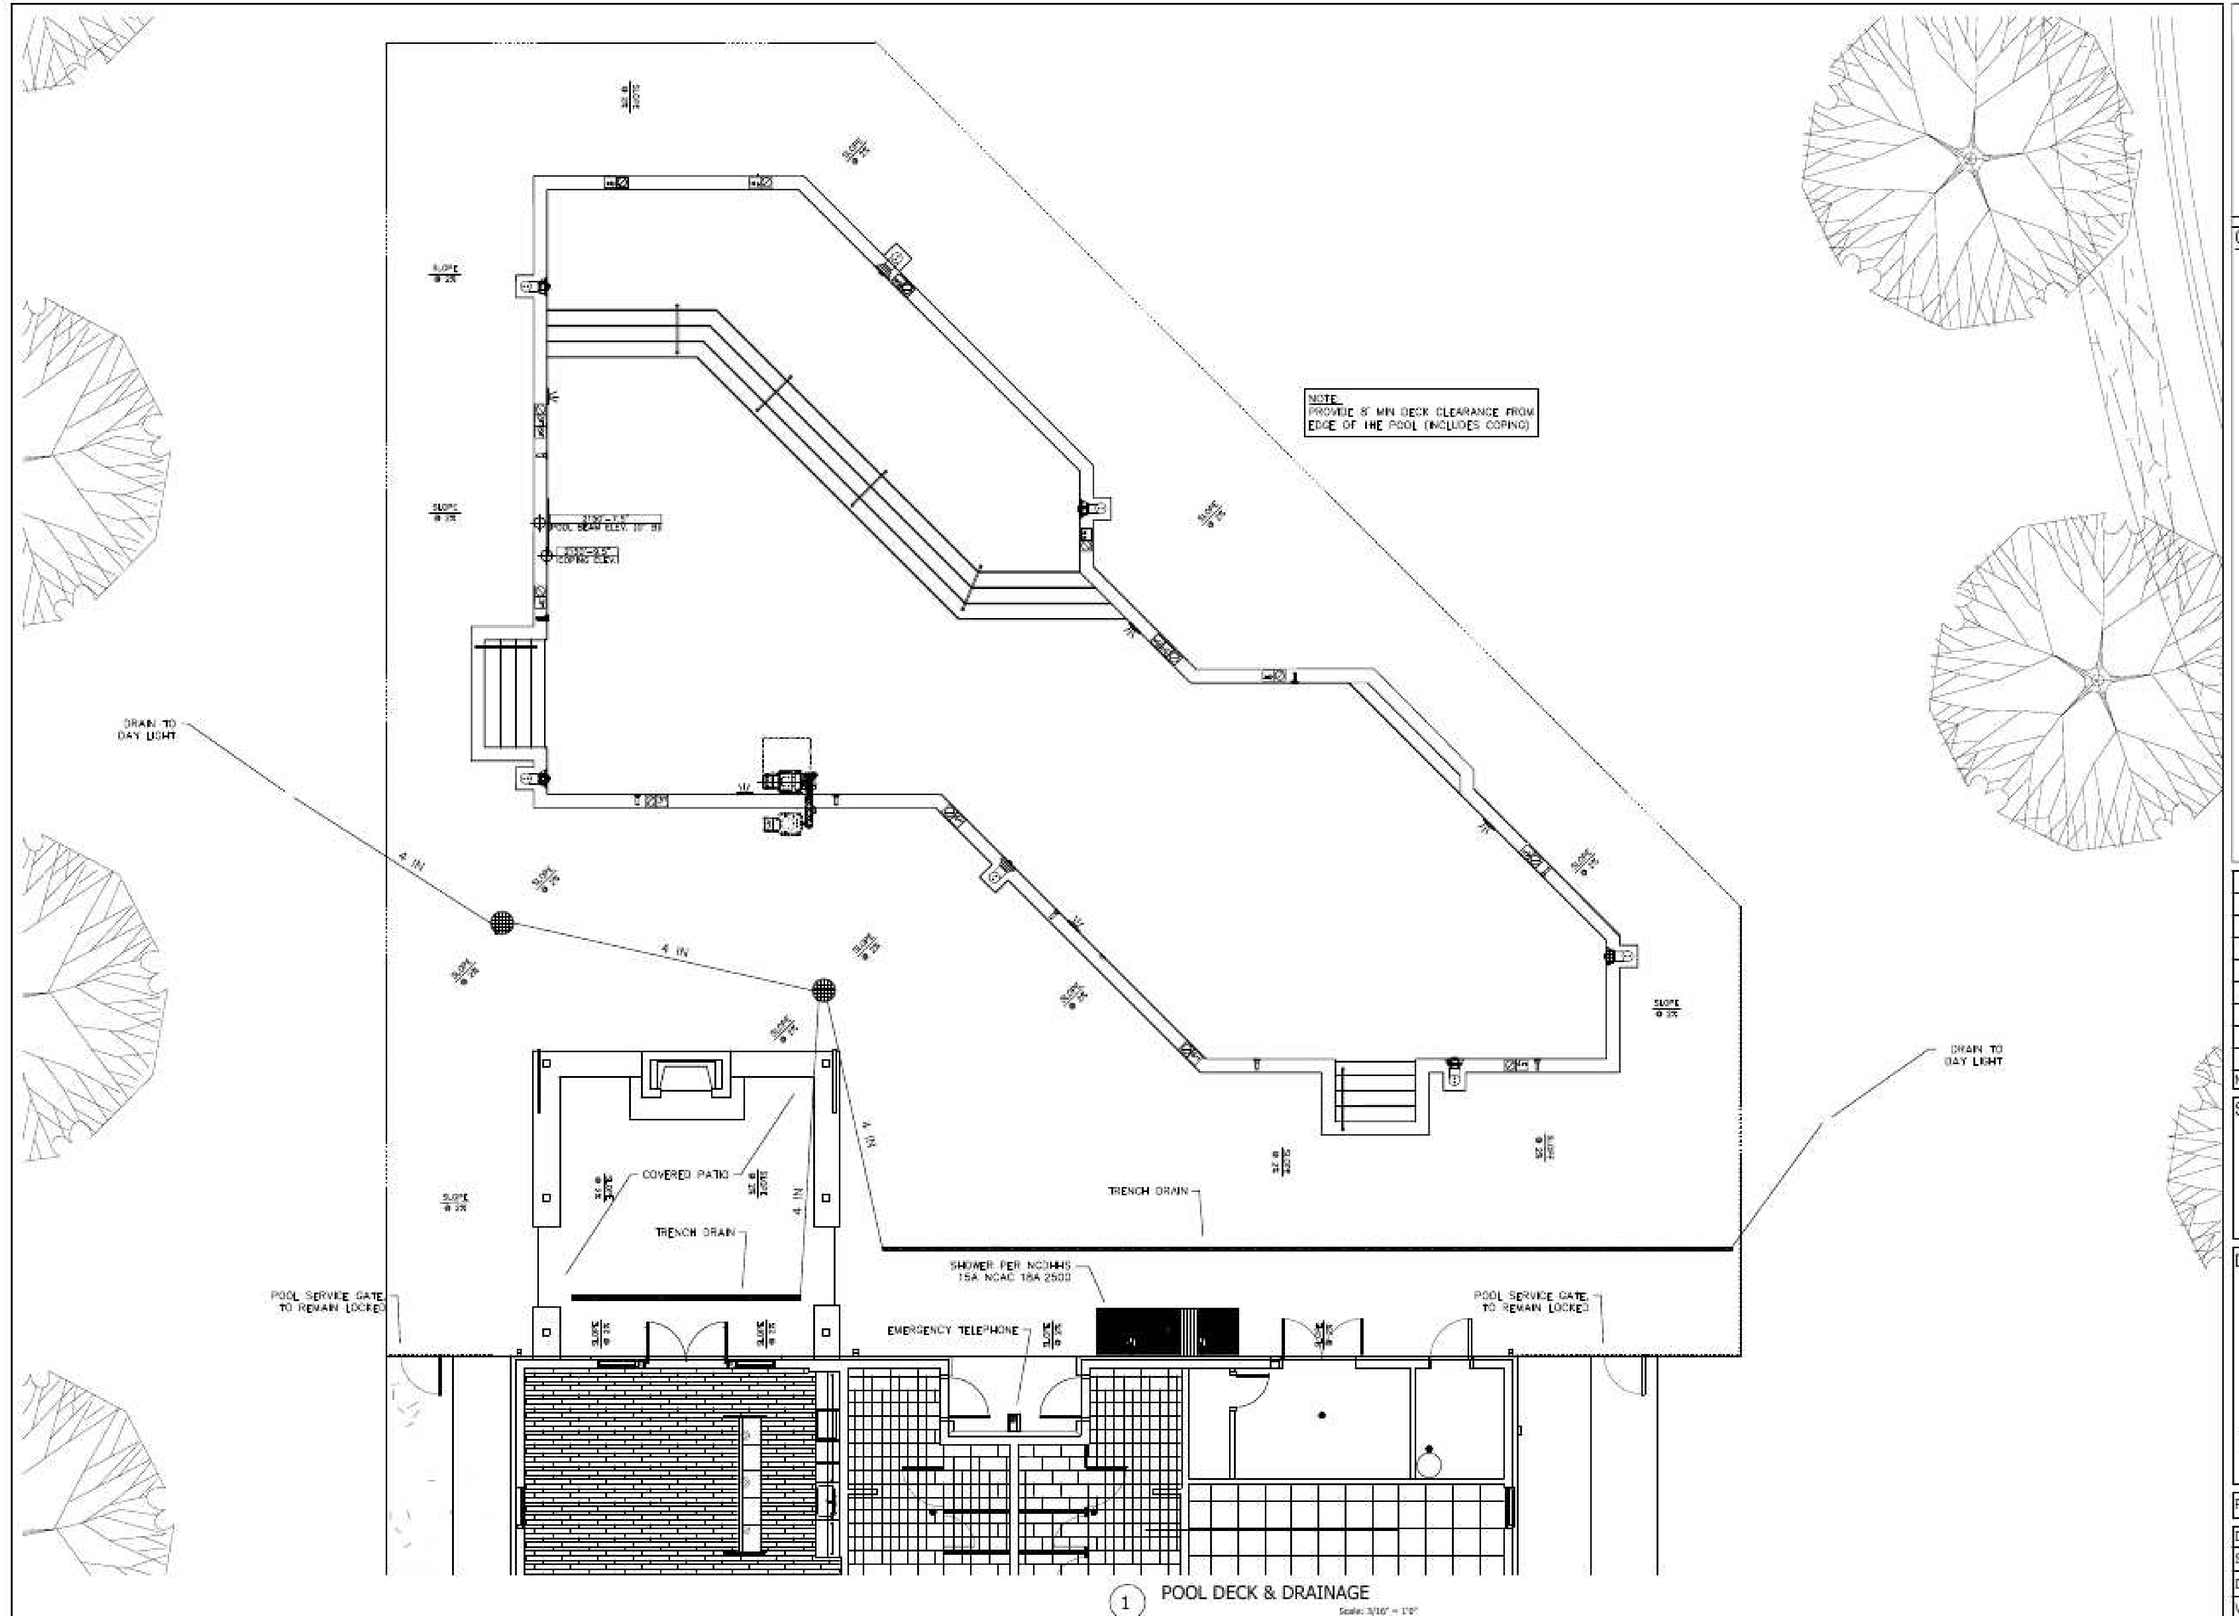

1 POOL DECK & DRAINAGE

Scale: 3/16" = 1'0"

Carolina Pools LLC
1062 S. Batesville Rd.
Greer, SC 29650
TEL: (864) 655 7016
CAROLINAPOOLSLLC.COM

CLIENT

DR.HORTON

ADAMS GLEM - SWIMMING POOL
ASHMORE BRIDGE ROAD MAULDIN SC

NO.	EMISSIONS & REVISIONS	DATES

SEAL:

Drawing Name:

DECK & DRAINAGE DETAIL

PROJECT NO:	019
DESIGN BY: PAUL	DRAWING NO.
SCALE: 3/16" = 1'0"	SP-10
DRAWN BY: IVAN	
VERIFY BY: PAUL	
START DATE: 20 JAN 2024	REVISION # 00