
WILDBROOK VILLAGE

SITE MAP

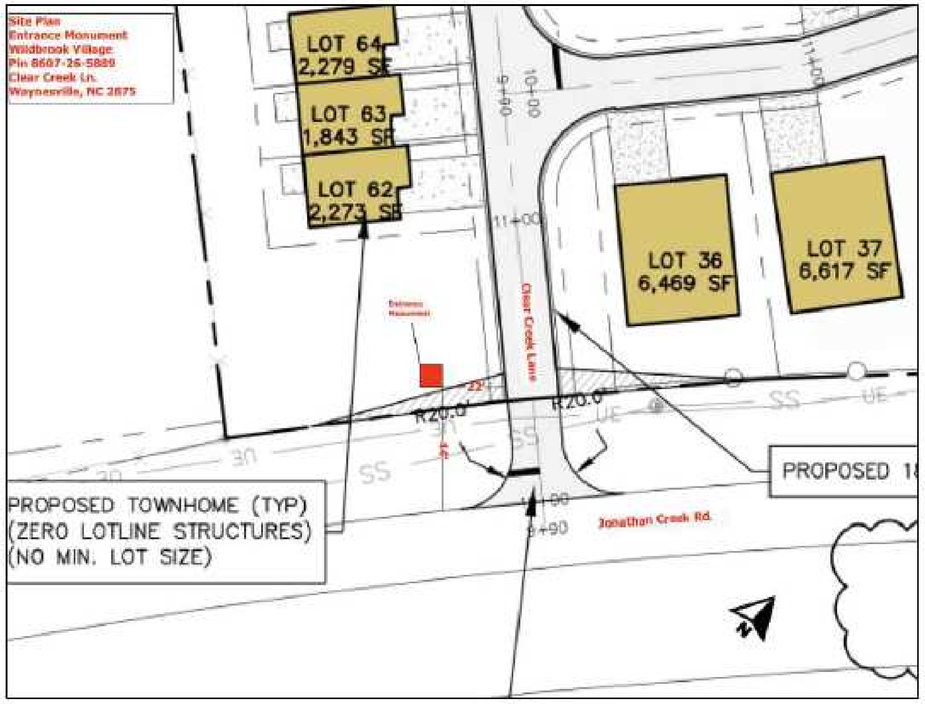

SHEET INDEX

NO.	SHEET NAME	ORIGINAL DATE	REV. DATE
EM-0	COVER PAGE	1/02/24	
EM-1	CONSTRUCTION NOTES	1/02/24	
EM-2	FOUNTAIN DIMENSIONS	1/02/24	
EM-3	ELECTRICAL LAYOUT	1/02/24	
EM-4	PLUMBING LAYOUT	1/02/24	

PROJECT CONTACTS

OWNER

D.R Horton
80 Peachtree Road
Suite 200
Asheville, NC 28803
T: 828.482.4690

SIGN CONTRACTOR

Carolina Pools, LLC.
1062 S Batesville Road,
Suite B
Greer, SC 29650
T: 864.655.7016

ELECTRICAL CONTRACTOR

IES Residential Inc.
4128 Revolution Pk. Dr.
Charlotte, NC 28217
T: 704.784.6368

PLUMBING CONTRACTOR

Southern App Grading & Excavation, Inc.
2034 Big Branch Rd.
Clyde, NC 28721
T: 878.507.5166

Carolina Pools LLC
1062 s. Batesville Rd.
Greer, SC 29650
TEL: (864) 417 8720
carolinapoolsllc.com

CLIENT
DR HORTON

Project Location
Clear Creek Ln.
Waynesville, NC 28785

NO.	EMISSIONS & REVISIONS	DATES

SEAL:

Drawing Name:
Cover Page

PROJECT NO: 01

DESIGN BY:	PAUL	DRAWING NO.	EM-0
SCALE:	NA		
DRAWN BY:	IVAN		
VERIFY BY:	PAUL		
START DATE:	Aug 8 2024	REVISION #	00

GENERAL:

The structure reflected on the drawings is structurally sound and in its completed condition shall be in compliance with Section H105 of 2018 NC Building Code. Any deviations from the completed structure represented in the drawings must be submitted to the Owner for approval in writing. The Owner shall verify all conditions including existing structures (above and below grade) and shall notify the Contractor of any discrepancies.The Sections and Details shown shall be considered to be typical for all similar conditions.

FOUNDATIONS:

Foundations shall bear on residual soils or engineered fill capable of supporting an allowance pressure of 2500 PSF for footings. Soils shall be stable, and any expansive, compressible, or shifting material shall be removed to ensure a stable moisture content. Slabs on grade are designed for a modulus of subgrade reaction of 150 PCI using a K = 30. Owner is responsible for site preparation, compaction and soil stabilization.

CAST-IN-PLACE CONCRETE:

1. All concrete work and materials shall be in accordance with ACI 318 2002 and ACI 301.
2. Minimum Material Specifications:
   Portland Cement: ASTM C150, Type 1
   Fly Ash: ASTM C 618, Type F (limit to 20% of cementitious content)
   Maximum water/cementious material ratio: 0.5
   Course Aggregate: ASTM C33. Maximum aggregate size to be 1"(#57).
   Water: Potable. No water may be added at the site without consent of the engineer. Any water to be held back at the batch plant to be added at the site must be noted on the project ticket.
3. Foundations: Foundation and floor shall have a compressive strength of 3000 PSI.
4. Reinforcing steel:
   All detailing, fabrication and placing shall be in accordance with towing, fabrication, and placing shall be in accordance with ACI 315. Reinforcing steel shall be new billet bars conforming to ASTM 8615, grade 60. Provide 3" cover for concrete cast against earth.

MASONRY:

Masonry work and materials shall comply with ACI 530 02. All CMU shall conform to ASTM C 90, ASA 879.1 for light weight block. Mortar shell conform with ASTM C 270, Type S. masonry cement. The minimum compressive strength of the system shall be 2000 PSI. CMU to be laid in running bond.

ELECTRICAL:

1. All fixtures and transformers shall be installed per manufacturer specifications. Electrical components shall be installed in compliance with NEC (Current edition).
2. All circuit breakers and outlets shall be GFCI protected per NEC.
3. All homerun and lead wire shall be installed at a minimum 6" depth utilizing PVC conduit and weatherhead.

Carolina Pools LLC
1062 s. Batesville Rd.
Greer, SC 29650
TEL: (864) 417 8720
carolinapoolsllc.com

CLIENT
DR HORTON

Project Location
Clear Creek Ln.
Waynesville, NC 28785


NO.	EMISSIONS & REVISIONS	DATES

SEAL:


Drawing Name:
Construction Notes

PROJECT NO: 015

DESIGN BY:	PAUL	DRAWING NO.	EM-1
SCALE:	NA		
DRAWN BY:	IVAN		
VERIFY BY:	PAUL		
START DATE:	Aug 8 2024	REVISION #	00

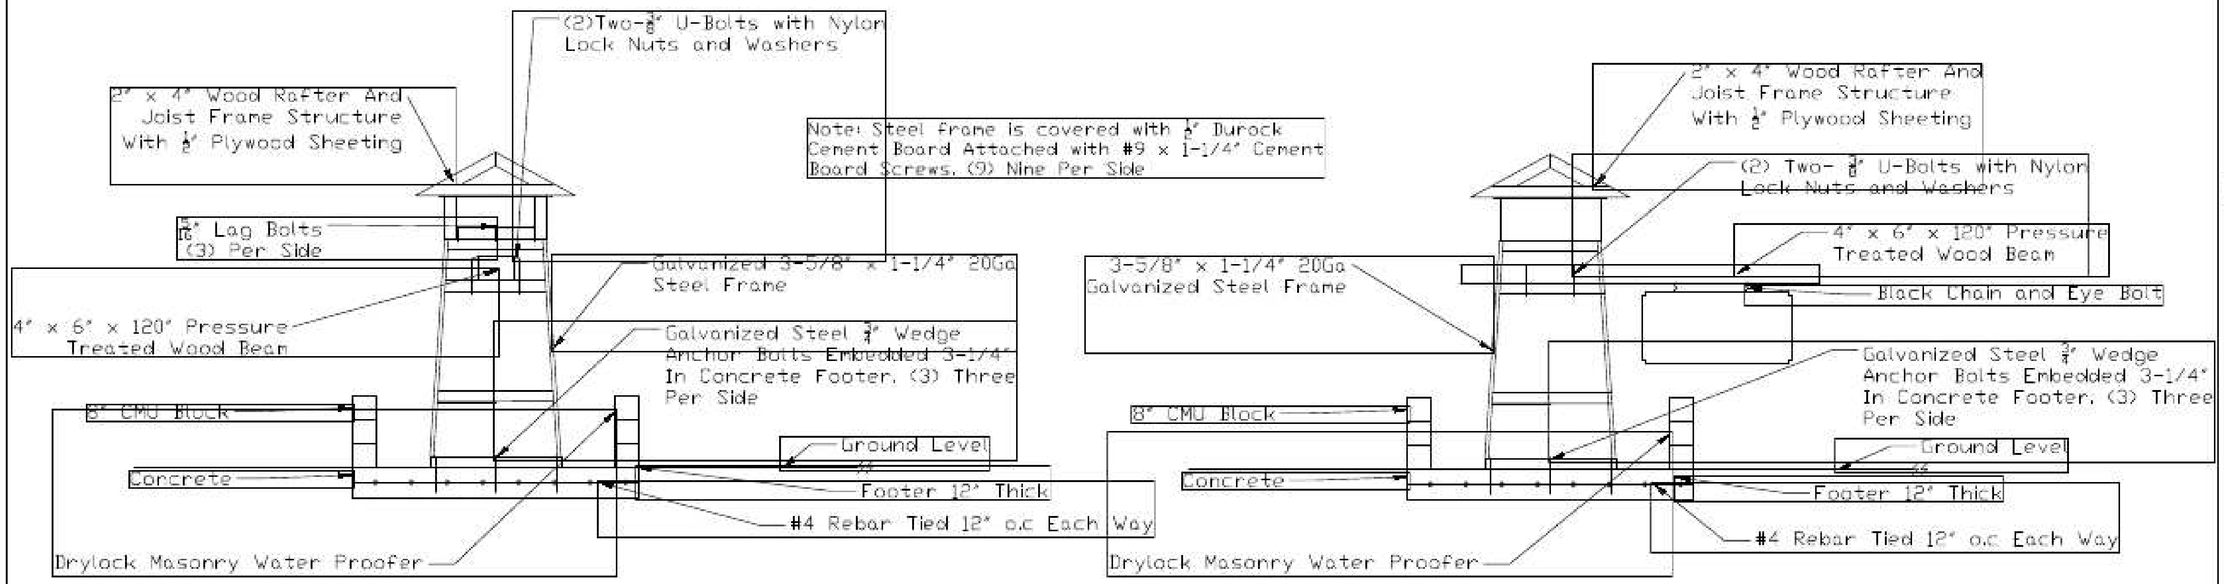

Structural Sectional View

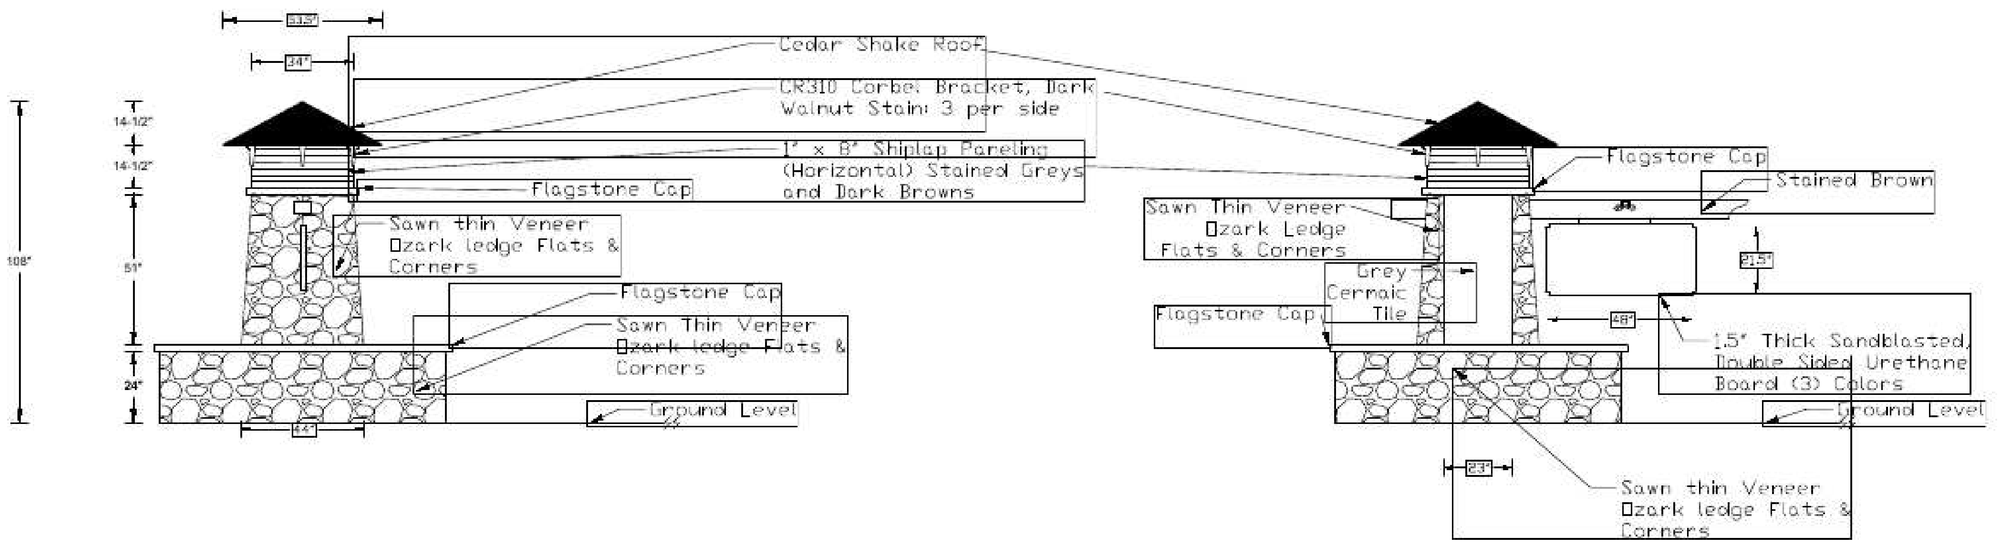

Architectural Views

Carolina Pools LLC
1062 s. Batesville Rd.
Greer, SC 29650
TEL: (864) 417 8720
carolinapoolsllc.com

CLIENT
DR HORTON


Project Location
Clear Creek Ln.
Waynesville, NC 28785

NO.	EMISSIONS & REVISIONS	DATES

SEAL:


Drawing Name:
Fountain Dimensions

PROJECT NO:	22
DESIGN BY: PAUL	DRAWING NO.
SCALE: 1/2"=1'0"	EM-2
DRAWN BY: IVAN	
VERIFY BY: PAUL	
START DATE: Aug 6 2024	REVISION # 00

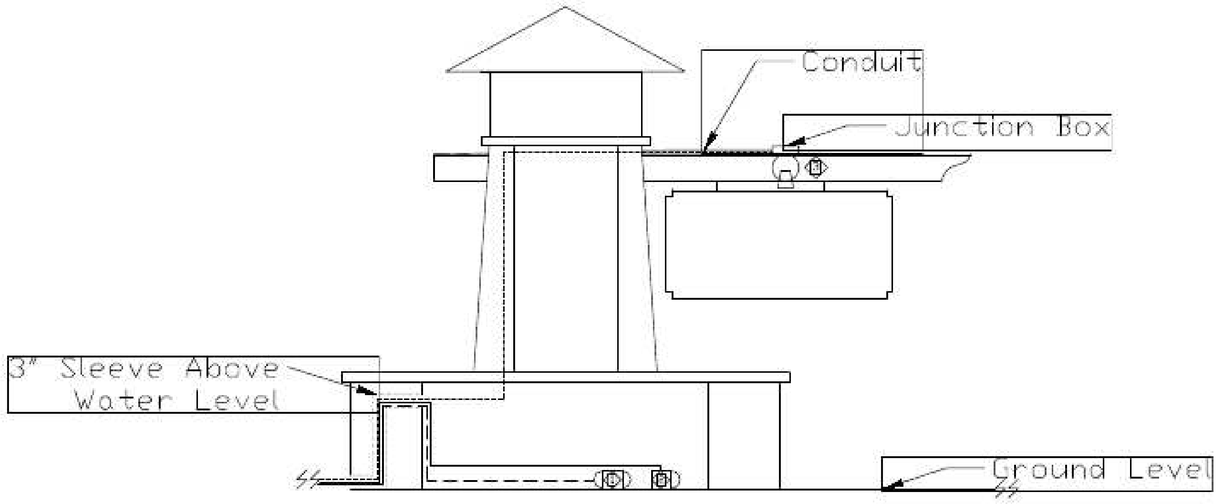

EQUIPMENT SERVICE REQUIREMENTS				
NO.	VOLTAGE	AMPERAGE	WATTAGE	CONNECTION
1	120V	2A	240W	Plug Into GCFI Outlet
2	120V	5A	50W	Plug Into GCFI Outlet
3	12V	1A	20W	Direct Wire To transformer
4	120V	1A	120W	Plug Into GCFI Outlet

EQUIPMENT LIST				
1	1	Water Feature Pump	ATLANTIC	TT4000
2	1	Filter Pump	Dase	G2-1250
3	2	Downward Facing Shielded Sign/Light	AQ Lighting	PNSL-R32
4	2	Low Voltage Transformer	Hampton Bay	SL-120-12A

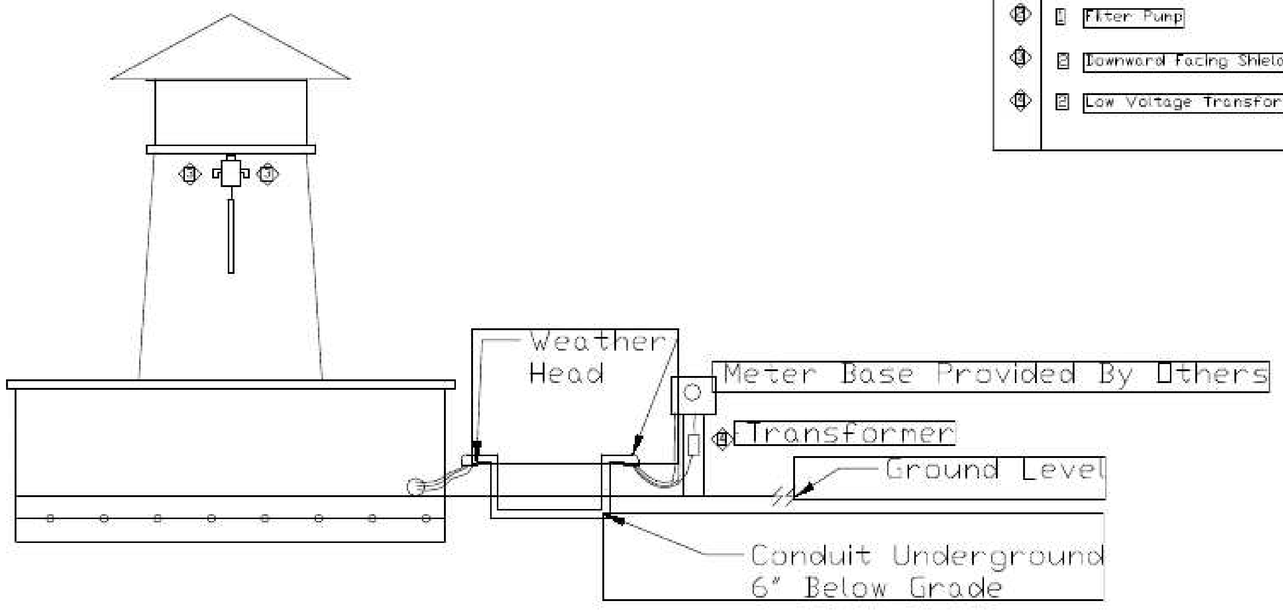

Carolina Pools LLC
1062 s. Batesville Rd.
Greer, SC 29650
TEL: (864) 417 8720
carolinapoolsllc.com

CLIENT
DR HORTON


Project Location
Clear Creek Ln.
Waynesville, NC 28785

NO.	EMISSIONS & REVISIONS	DATES


SEAL:

Drawing Name:
Electrical Layout

PROJECT NO:	22
DESIGN BY: PAUL	DRAWING NO.
SCALE: 1/2"=1'	EM-3
DRAWN BY: IVAN	
VERIFY BY: PAUL	
START DATE: Aug 15 2024	REVISION # 00

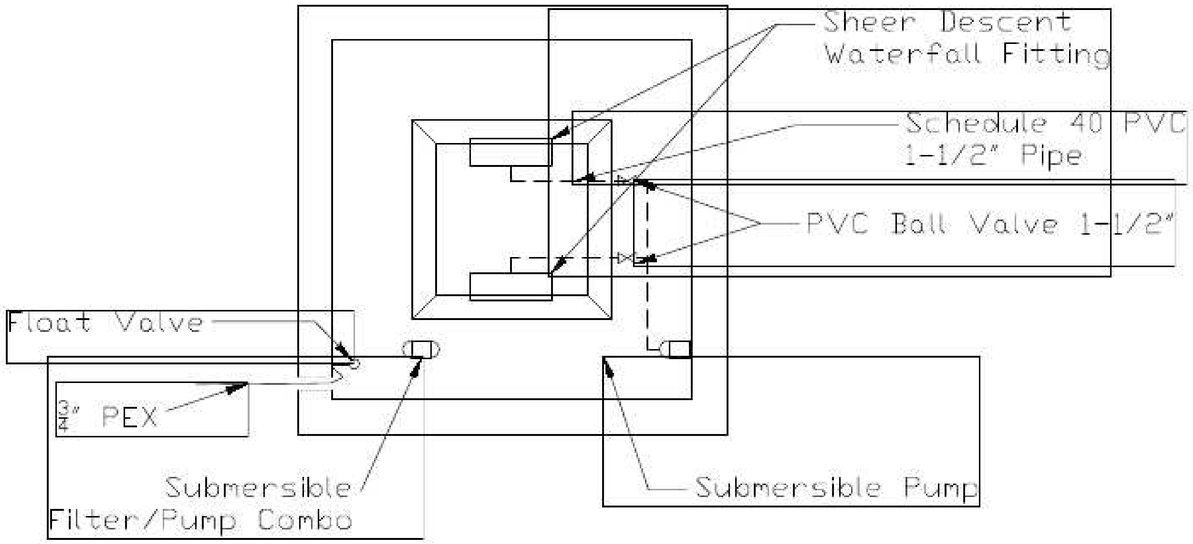

Top View

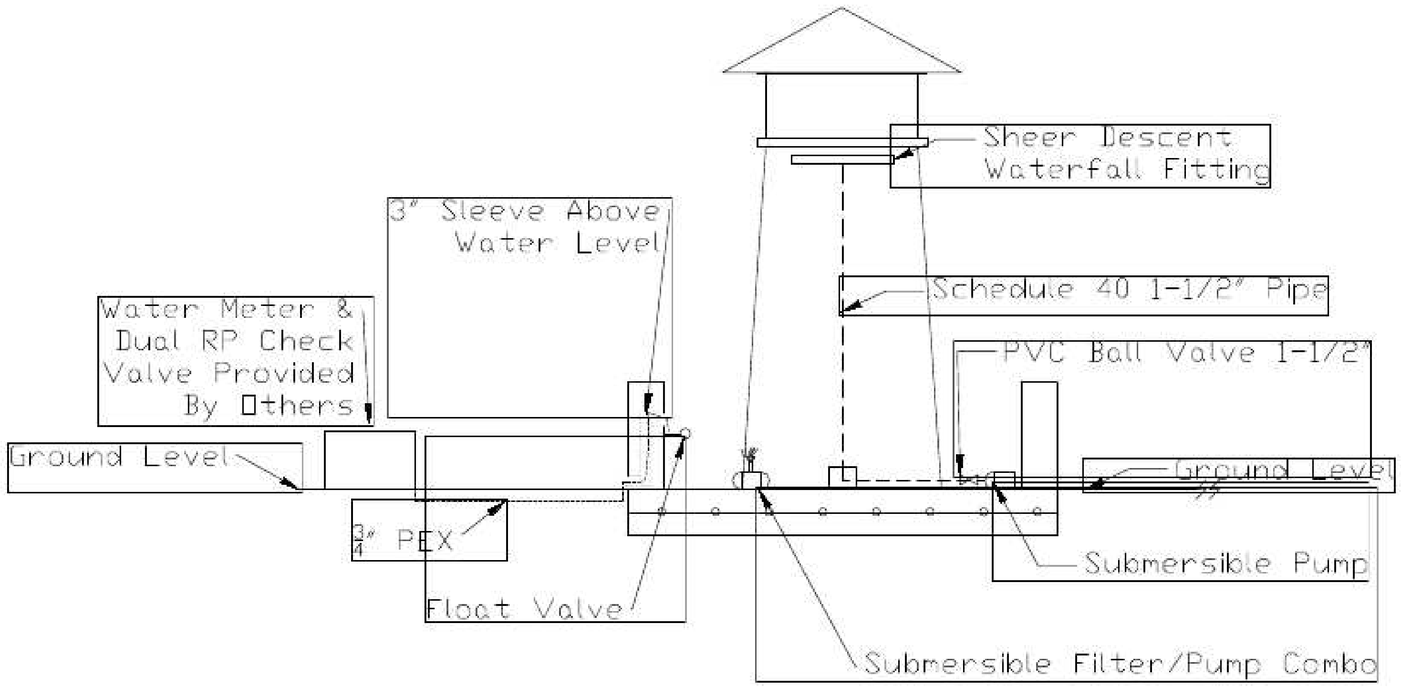

Side View

Carolina Pools LLC
1062 s. Batesville Rd.
Greer, SC 29650
TEL: (864) 417 8720
carolinapoolsllc.com

CLIENT
DR HORTON

Project Location
Clear Creek Ln.
Waynesville, NC 28785

NO.	EMISSIONS & REVISIONS	DATES

SEAL:

Drawing Name:
Plumbing Layout

PROJECT NO: 22

DESIGN BY:	PAUL	DRAWING NO.	
SCALE:	3/4" = 1'0"		EM-4
DRAWN BY:	IVAN		
VERIFY BY:	PAUL		
START DATE:	Aug 15 2024	REVISION #	00